

NATIONAL GUARD PRODUCTS, INC.

L-FRA100-SP

Low Profile Self-Attaching Lite Kit for Variable Door and/or Glass Thickness

STANDARD FEATURES

- * 18 ga. cold rolled steel
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Counter-sunk mounting screw-holes
- * #8 Phillips head SMS
- * Available in uneven and fractional sizes
- * Standard finish = (GPZ) Gray Primer

REQUIRED INFORMATION


- * Specify glass thickness on order.
- * Specify door thickness on order if other than 1 3/4"

OPTIONAL FEATURES

- * See page L2 for optional finishes
- * Torx Security Screws
- * Galvanneal - A40 Steel
- * Zinc electro-plating
- * Glass & Glazing tape (Pages L23-L27)
- * Lead lining

UL10C POSITIVE PRESSURE FIRE-RATED

- * Fire-Lite® Plus or Pilkington Pyrostop™: requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.

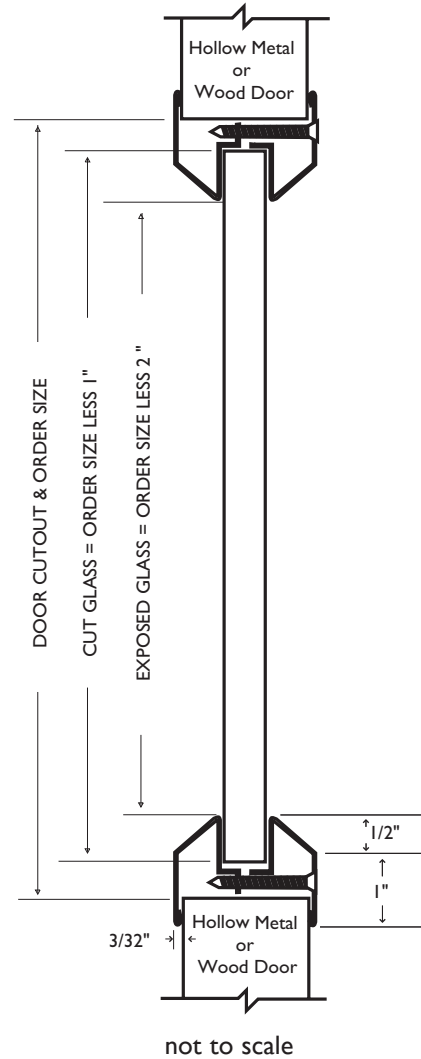

Low Profile Lite Kit - L-FRA100-SP

Details shown are for 1 3/4" door thickness
 Only configurations shown are available
 *indicates that thicker glazing tape is required

