

L-SG100

Self Attaching Lite Kit with Security Grille for Variable Door and/or Glass Thickness

STANDARD FEATURES

- * 18 ga. cold rolled steel
- * 16 ga. steel 3/4" x 3/4" security grille welded in both sides
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Countersunk mounting screw-holes interior side
- * #6 Phillips truss head screws
- * Standard finish = (GPZ) Gray Primer

REQUIRED INFORMATION


- * Specify glass thickness on order
- * Specify door thickness on order if other than 1-3/4". (See page L13 for available sizes)

OPTIONAL FEATURES

- * See page L2 for optional finishes
- * False mullion bars (Page L7)
- * Torx security screws
- * Zinc electro-plating
- * Galvanneal - A40 Steel
- * Glass & glazing tape (Pages L23-L27)
- * Lead lining

UL10C POSITIVE PRESSURE FIRE-RATED

- * Fire-rated 1/4" thick wire glass:
 - 20 min. requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.
 - 45, 60, 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- * Fire-Lite® NT, Fire-Lite® Plus, Pilkington Pyrostop™ or Fireglass 20™ requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.

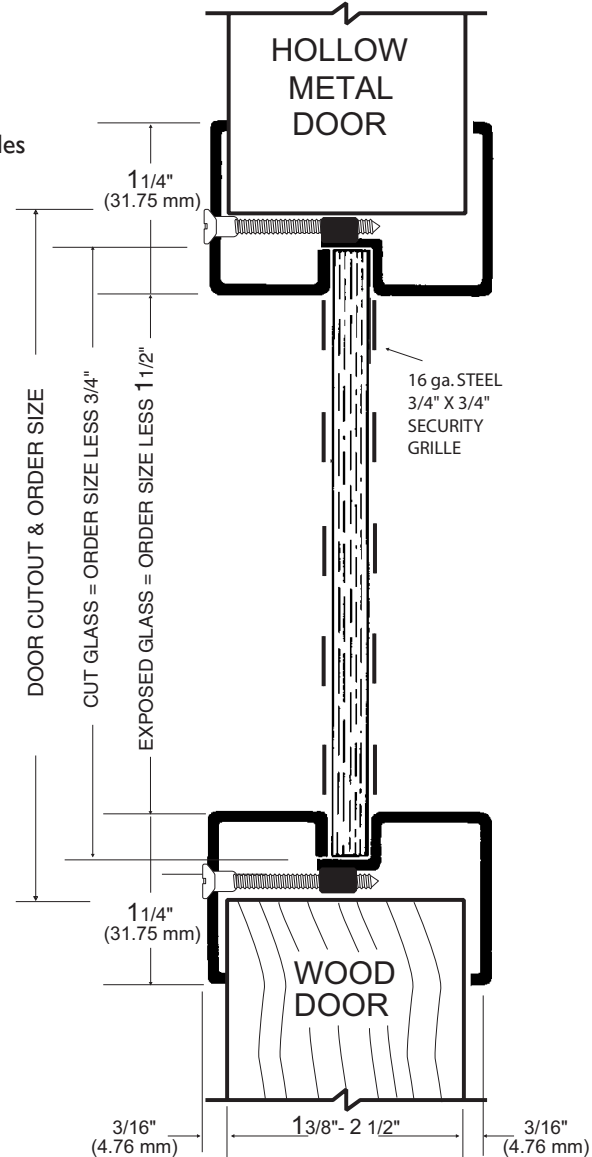

not to scale

