

L-FRA-100-RD

Round Glass Vision Lite Kit, Self Attaching

STANDARD FEATURES



- * 20 ga. cold rolled steel
- * Countersunk mounting screw-holes
- * #8 Phillips head SMS
- * For 1 3/4" door, accepts 3/16", 1/4", or 5/16" glass
- * Putty (beige) finish standard
- * Available in 12", 18" and 24" sizes only

OPTIONAL FEATURES

- * Gray primer and dark bronze finishes
- * Zinc electro-plating
- * Galvanneal - A40 steel
- * Glass & Glazing tape (Pages L23-L27)

UL10C POSITIVE PRESSURE FIRE-RATED

- * Fire-rated 1/4" wire glass:
20 min. requires closed cell PVC foam glazing tape like NGP GT-116.
45, 60, 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- * Fire-Lite® NT, FireLite® Plus or Fireglass 20™ requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.

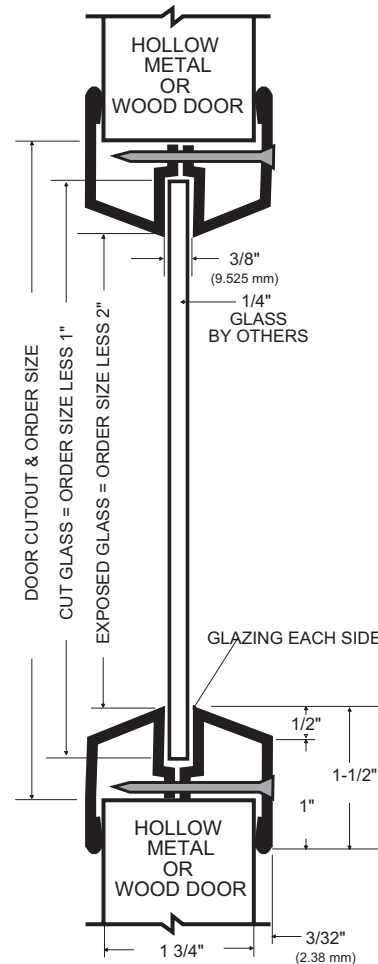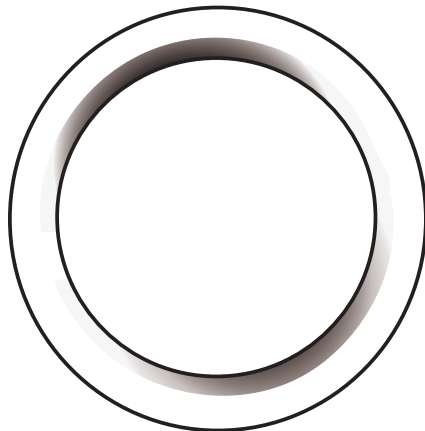

not to scale

