


L-CLIPS

For Optional Reinforcement of 1 3/4" Hollow Metal Doors

- * 20 ga. steel.
- * 4" length clip
- * For spot reinforcement of cut-outs in hollow metal doors.
- * ULI0B, ULI0C tested

NGP Lite Kits on Fire-rated Hollow metal doors do NOT require L-clips or channels welded in the doors.

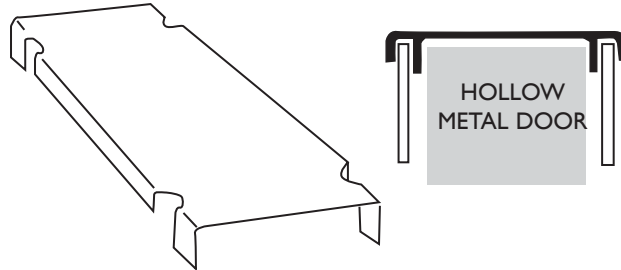

GLAZING TAPE


GT-16 3/8" wide x 1/16" thick - 50' rolls.

- * Butyl rubber glazing tape with adhesive both sides. Black
- * For use in lite kits on ULI0B Fire-rated wood-type or steel doors, using 1/4" fire-rated wire glass, up to 90 minutes.

GT-116 3/8" wide x 1/16" - 150' rolls

GT-118 3/8" wide x 1/8" thick - 75' rolls.

- * Closed cell PVC Foam glazing tape with adhesive both sides.
- * Color is black.
- * For use in lite kits on ULI0C positive pressure fire-rated wood-type or steel doors, using 1/4" fire-rated wire glass or Fireglass 20™ up to 20 minutes
- * For use in lite kits on ULI0B or ULI0C fire-rated wood-type or steel doors, using Fire-Lite® NT, Fire-Lite® Plus, or Pilkington Pyrostop™ glass up to 180 minutes.

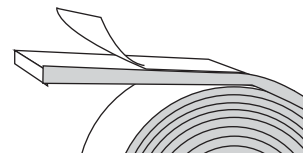

9800C 1/2" wide x 1/16" thick - 17', 21', 150' rolls.

- * Intumescent glazing tape with protective skin one side and adhesive on other side. Color is black.
- * For use in lite kits on ULI0C positive pressure fire-rated wood-type or steel doors using 1/4" fire-rated wire glass, up to 90 minutes.