

## L-GLFI00

### Self Attaching Lite Kit for 1 3/4" Door with 3/16", 1/4", or 5/16" Glass

#### STANDARD FEATURES



- \* 18 ga. cold rolled steel
- \* Mitered and welded corners
- \* Welded reinforcing clips at corners
- \* Countersunk mounting screw-holes interior side
- \* #6 x 1-3/4" Phillips Truss Head Screws
- \* Standard finish = (GPZ) Gray Primer

#### OPTIONAL FEATURES

- \* See page L2 for optional finishes
- \* False mullion bars (page L7)
- \* Torx Security Screws
- \* Zinc electro-plating
- \* Galvanneal - A40 Steel
- \* Glass & Glazing tape (Pages L23-L27)
- \* Lead lining

#### UL10C POSITIVE PRESSURE FIRE-RATED:

- \* Fire-rated 1/4" wire glass:  
20 min. requires closed cell PVC foam glazing tape like NGP GT-116.  
45, 60 or 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- \* Fire-Lite® NT, Fire-Lite® Plus, or Fireglass 20™ requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.

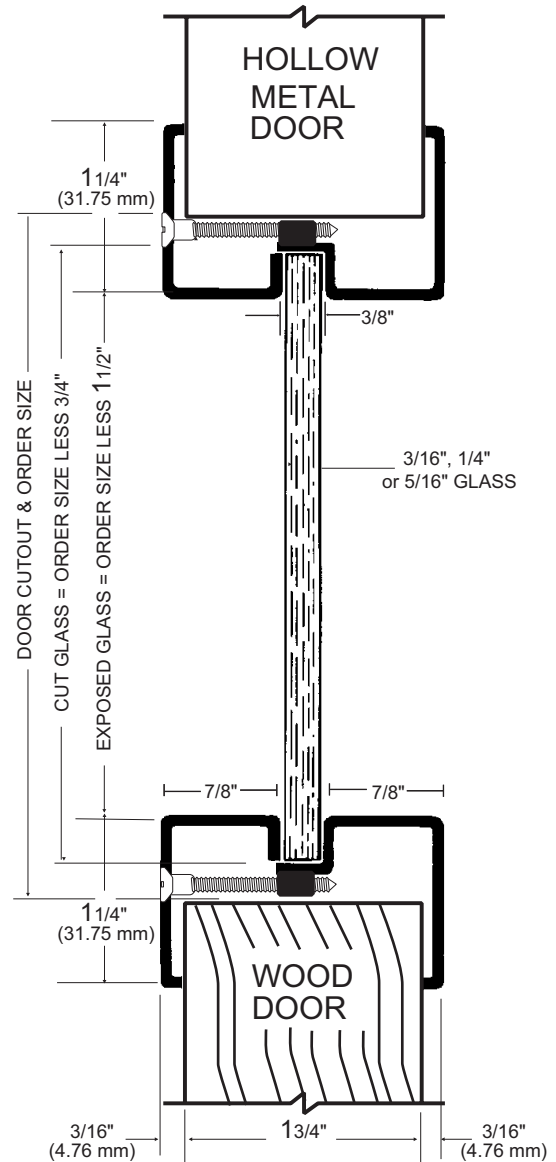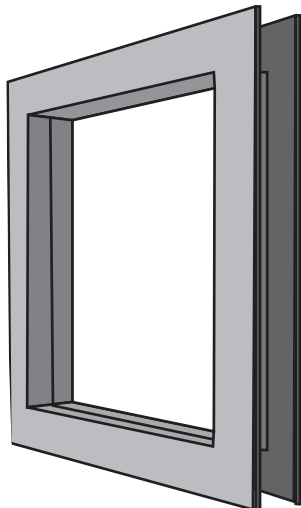

not to scale



Designed for use on 1 3/4" thick doors manufactured within door industry tolerance of +/- 1/16".