

## L-GLFI00-SP

### Self Attaching Lite Kit for Variable Door and/or Glass Thickness

#### STANDARD FEATURES

- \* 18 ga. cold rolled steel
- \* Mitered and welded corners
- \* Welded reinforcing clips at corners
- \* Countersunk mounting screw-holes interior side
- \* #6 Phillips Truss Head screws
- \* Standard finish = (GPZ) Gray Primer

#### REQUIRED INFORMATION



- \* Specify glass thickness on order
- \* Specify door thickness on order if other than 1-3/4"

#### OPTIONAL FEATURES

- \* See page L2 for optional finishes
- \* False mullion bars (Page L7)
- \* Torx Security Screws
- \* Zinc electro-plating
- \* Galvanneal - A40 Steel
- \* Glass & Glazing tape (Pages L23-L27)
- \* Lead lining

#### UL10C POSITIVE PRESSURE FIRE-RATED

- \* Fire-rated 1/4" wire glass:  
20 min. requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.  
45, 60, 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- \* Fire-Lite® NT, Fire-Lite® Plus, Pilkington Pyrostop™ or Fireglass 20™ requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.

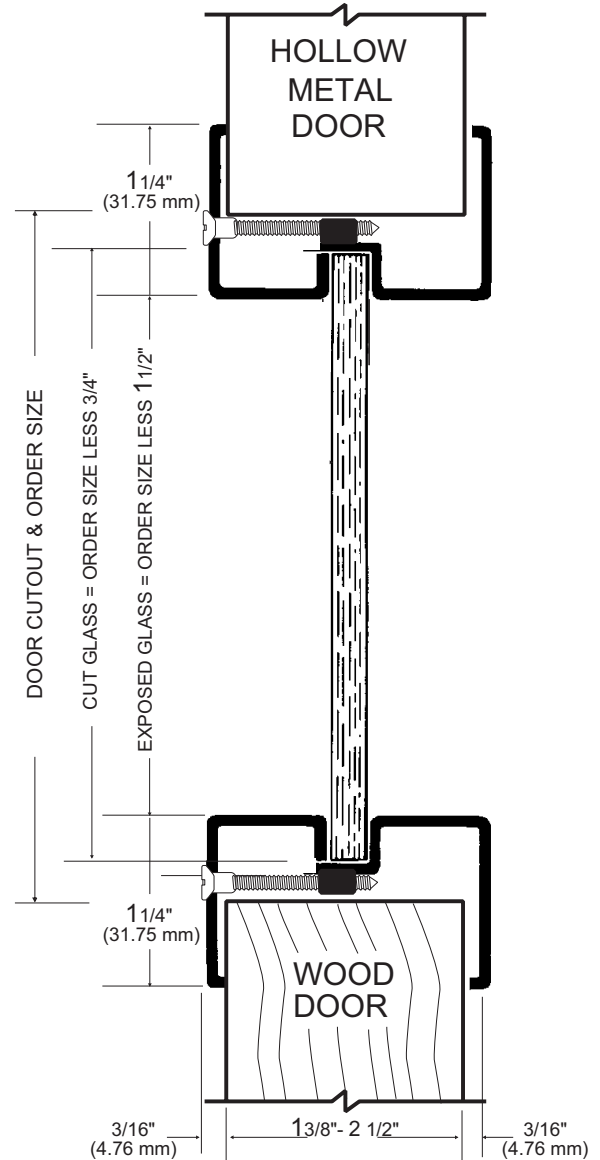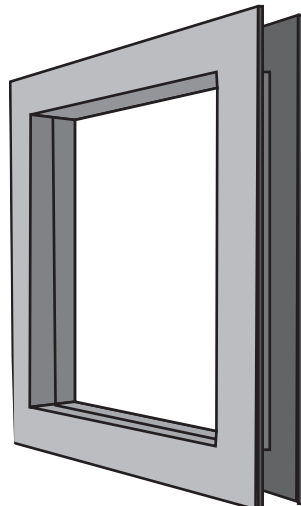

not to scale

