

L-GLF100-TB

Thru-bolted Lite Kit for 1-3/4" Doors with 3/16", 1/4", or 5/16" Glass

STANDARD FEATURES

- * 18 ga. cold rolled steel
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Countersunk mounting screw-holes
- * Thru-bolts for 1-3/4" door
- * Standard finish = (GPZ) Gray Primer

OPTIONAL FEATURES

- * See page L2 for optional finishes
- * False Mullion bars (Page L7)
- * #8 x 3/4" Phillips head SMS both sides (specify "pack with screws")
- * Torx Security screws both sides
- * Zinc electro-plating
- * Galvanneal - A40 Steel
- * Glass & Glazing tape (Pages L23-L27)
- * Lead lining

L-GLF100-SP-TB

Thru-bolted Lite Kit for 1 3/4" doors, with variable glass thickness 1/2" up to 1 1/4"

STANDARD FEATURES

- * 18 ga. cold rolled steel
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Countersunk mounting screw-holes
- * Thru-bolts for 1-3/4" door
- * Standard finish = (GPZ) Gray Primer


REQUIRED: Specify Glass thickness

OPTIONAL FEATURES

- * See page L2 for optional finishes
- * False Mullion bars (Page L7)
- * Torx Security screws both sides
- * Zinc electro-plating
- * Galvanneal - A40 steel
- * Glass & Glazing tape (Pages L23-L27)
- * Lead lining

UL10C POSITIVE PRESSURE FIRE-RATED

- * Fire-rated 1/4" wire glass:
20 min. requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.
45, 60, 90 min. requires NGP 9800 or 3M GIS intumescent glazing tape.
- * Fire-Lite® NT, Fire-Lite® Plus, Pilkington Pyrostop™ or Fireglass 20™ requires closed cell PVC foam glazing tape like NGP GT-116 or GT-118.

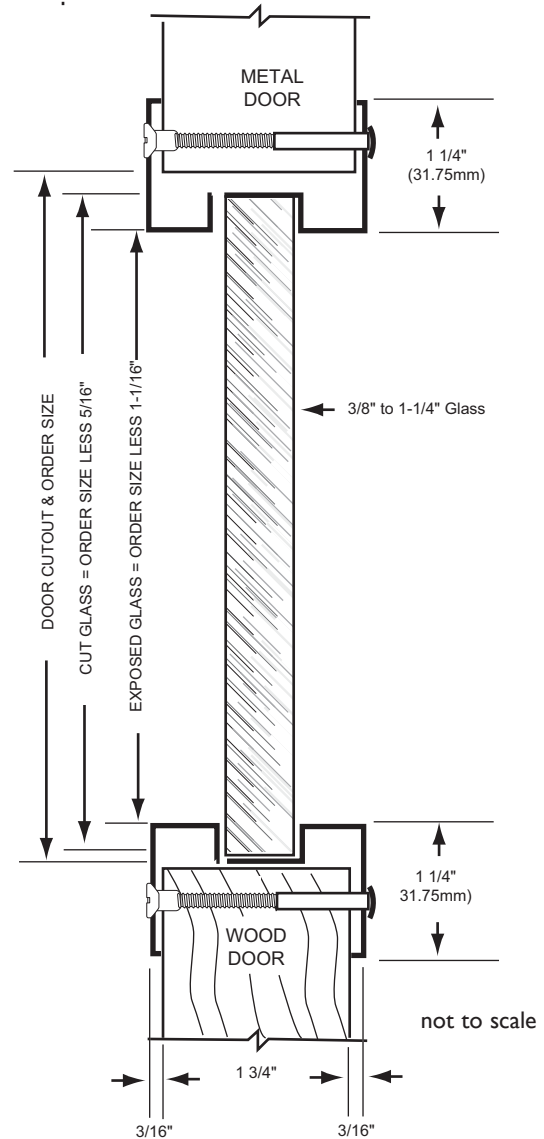

Designed for 1 3/4" thick Doors manufactured within door industry tolerance of +/- 1/16"

