

National Guard Products Inc.


1-800-
647-7874

NGP

L-VGLF Series Security Frames

Installation Instruction

1. Cut out door in accord with door manufacturer's procedure.
2. Outside: apply a bead of silicone sealant to the inside lip of the outer frame and position outer frame in the door cut-out.
3. Inside: Attach inner frame to outer frame with (8) #6 x 5/8" hex-head screws.
4. Apply a bead of silicone sealant around perimeter of polycarbonate plastic and insert into kit.
5. Attach inner panel with #8 x 3/4" screws provided.

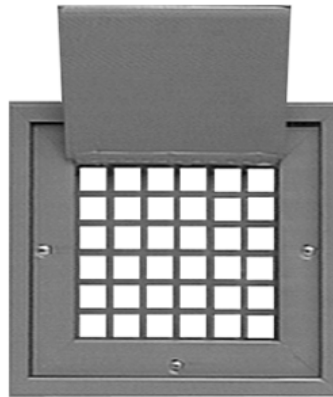

FIELD PAINTING: for best results, scuff finish with scouring pad or sand paper before painting.

4/05