


THE PRODUCTS YOU COUNT ON. THE PEOPLE YOU TRUST.



NATIONAL GUARD
PRODUCTS

Requires installation of
ALL components below

Steel Stop Extender




9945

16 Gauge, Gray Primer Finish

Furnished with #10 X 1" TEK SMS
Available in 36", 48", 84", 96" lengths

Patent No.: US9,273,510B2


NGP-Edge® Intumescent Seal with PVC cover




9400 Gray
9400 DKB Brown

Available in 36", 48", 84" and 96" lengths

Self-Adhesive



Self-Adhesive TPE Seal



5075B Brown
5075CL Clear



*Anti-Microbial not available in clear



Available in 36", 48", 72", 84",
96" and 108" lengths

Gap Solution for Excessive Fire Door and Frame Clearance— 45 Minute


UL Certified Solution for Fire doors with Excessive
clearance between door and frame over 1/8", up to 5/16"

45 minute rated UL Cer-
tified Miscellaneous Fire
Door Accessory UL10B
and UL10C wood or
hollow metal fire doors

An NGP strike shim 9275
or 9225 is also required for
proper latchbolt engagement

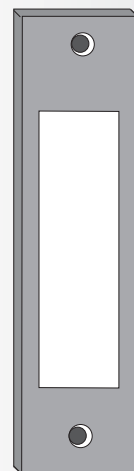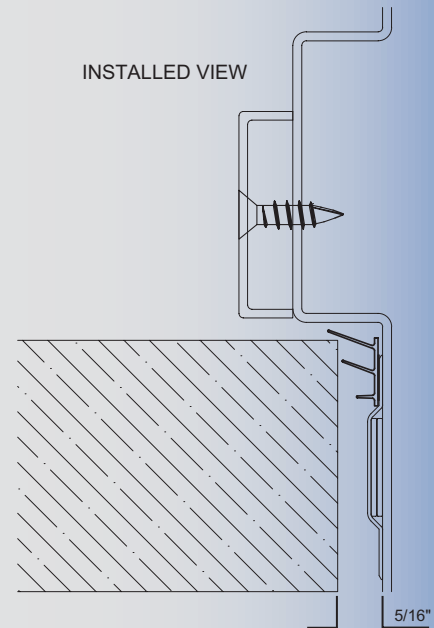

9275
Gray Paint finish



9225
Gray Paint finish

Strike Shims — 45 Minute

9275 - Fits 4-7/8" 'ASA' Strike Plate

9225 - Fits 2-3/4" 'T' Strike Plate

UL Certified Miscellaneous
Fire Door Accessory for
excessive door and frame
clearances, measuring up
to 5/16"

45 minute rated UL10B and
UL10C wood or hollow metal
fire doors

4985 East Raines Road • Memphis, TN 38118 • Phone: (800) 647-7874 • Fax: (800) 255-7874 • www.ngp.com



THE PRODUCTS YOU COUNT ON. THE PEOPLE YOU TRUST.




NATIONAL GUARD
PRODUCTS

Gap Solution for Excessive Fire Door Bottom Undercut/Clearance — 45 Minute

UL Certified Solutions for Fire doors with Excessive Door Bottom Clearance up to 1-1/2"

NGP-Edge® Intumescent Door Shoes

9245 Series

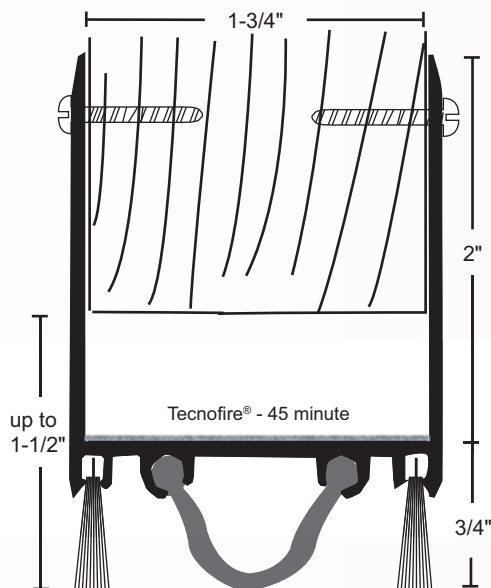

9245NWA neoprene & nylon brush
9245NWDKB neoprene & nylon brush

#6 x 3/4" Stainless Steel SMS furnished.

A- anodized aluminum
DKB - dark bronze


vinyl is gray
neoprene is black
thermoplastic is dark brown
nylon brush is gray with anodized aluminum; black with DKB metal

UL Certified Miscellaneous Fire Door Accessory for excessive door bottom undercut/clearance, measuring up to 1-1/2"


45 minute rated UL10B and UL10C wood or hollow metal fire doors

Restricts the passage of smoke


End caps available - sold separately



Gasketing options:

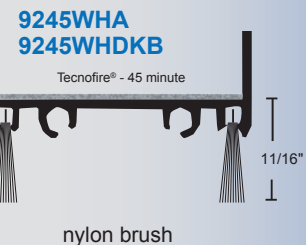

nylon brush



neoprene



vinyl



thermoplastic



nylon brush & thermoplastic

4985 East Raines Road • Memphis, TN 38118 • Phone: (800) 647-7874 • Fax: (800) 255-7874 • www.ngp.com

