



# GAPGUARD

Fire Door Accessories

## PRODUCT OVERVIEW

GapGuard Fire Door Accessories are UL Certified for use on Hollow Metal and Wood Fire-Rated Doors, up to 90 Minutes

For the complete list of GapGuard Fire Door Accessories, the most up-to-date product information and installation instructions, scan the QR code or visit [ngp.com](http://ngp.com).



UL CERTIFIED FOR USE IN THE US AND CANADA



### GAP90

Fire Door Head/  
Jamb Gap Solutions

- 1/8" - 3/8" Gaps
- Non-Handed
- In-Field Modifiable
- Available in Dark Brown and Gray



### GAP90N

Fire Door Head/  
Jamb Gap Solutions  
for Narrow Stops

- 1/8" - 3/8" Gaps
- For use when the Soffit Depth is Between 1/2" and 1 3/8"
- Non-Handed
- In-Field Modifiable
- Available in Dark Brown and Gray




\*See Installation Requirements

### GAP90-ME

Meeting Edge and  
Perimeter Gap Solution

- Application Certified for Fire Doors and Frames with Excessive Clearance up to 3/8"
- Non-Handed
- In-Field Modifiable
- Gray Finish



### 9990

Fire Door Top  
Gap Solution

- Door Top Gaps, Measuring up to 1/2"
- Non-Handed
- In-Field Modifiable
- Recommended for Doors with Parallel Arm Closers
- Brushed Stainless Steel Finish



UL CERTIFIED FOR USE IN THE US AND CANADA




**9590**  
Fire Door Bottom Gap Solution

- Door Bottom Gaps, Measuring up to 1½"
- Non-Handed
- In-Field Modifiable
- Brushed Stainless Steel Finish




**9595DKB**  
Floating Fire Door Bottom Gap Solution

- Door Bottom Gaps, Measuring up to 1¾"
- Non-Handed
- Designed to Travel Over Uneven Floors, With a Range of ¾"
- Optional L-Bracket Allows for Easy Installation
- Powder-Coated Dark Brown (DKB)

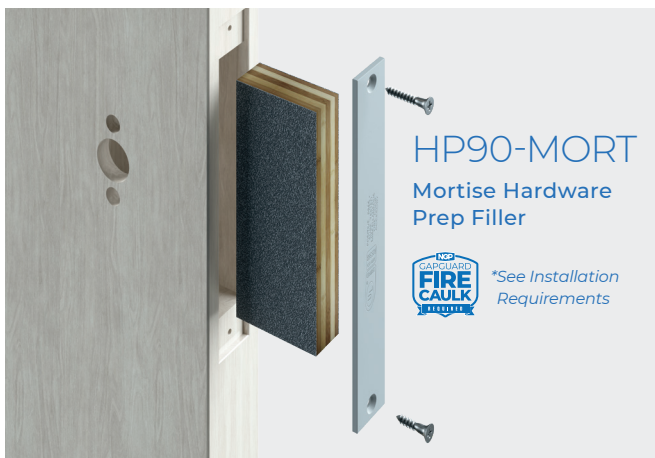


**HP90-MORT**  
Mortise Hardware Prep Filler

 \*See Installation Requirements



**HP90-FB**  
Flush Bolt Hardware Prep Filler

 \*See Installation Requirements



**HP90-CYL**  
Cylindrical Hardware Prep Filler

 \*See Installation Requirements

**GAPGUARD FIRE CAULK**

- Fill up to a ½" Diameter Thru-Hole on 60 & 90 Minute Doors
- Fill up to a 1" Diameter Thru-Hole on 20 & 45 Minute Doors
- Fully-Cured in 24 Hours
- Sandable/Paintable
- Color: Tan
- 10 Tubes per Box
- 3.0 oz. Tubes, 6 Tubes per Box



 \*To retain UL Certification, the products indicated must be installed using GapGuard Fire Caulk.

NGP-GAP-QUI-0525-A



**NATIONAL GUARD PRODUCTS, INC.**

**MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**  
3689 Arrowhead Drive  
Carson City, NV 89706

**Fax:** (800) 255-7874  
**Email:** info@ngp.com  
**Quotes:** quotes@ngp.com  
**Orders:** orders@ngp.com

**ngp.com**  
**1-800-NGP-RUSH**