CONDENSED

CATALOG

NGP-CAT-CON-1026-A

CELEBRATING NGP 90 YEARS

IT'S NOT "JUST" BUSINESS WITH NGP, IT'S PERSONAL

IN A MARKET FULL OF MERGERS AND CORPORATE RED TAPE, NGP STANDS APART. WE'RE STILL INDEPENDENT. STILL FAMILY-RUN. STILL ANSWERING TO OUR CUSTOMERS — NOT WALL STREET.

We've never believed in being "just" a manufacturer. Products matter — but people matter more. That's why our team is built on service, trust, and relationships that last. For 90 years, we've grown by listening. Every conversation we have with you shapes the way we do business. Your challenges become our opportunities. Your ideas become our priorities. That's why, after nearly a century, our mission is the same as day one: put the customer first, every single time.

Because at the end of the day, we're more than a manufacturer.
We're your partner. Your problem-solver. Your team.

THE TEAM • THE PRODUCTS THE SERVICE

REAL CUSTOMER SERVICE
No robots allowed! We pride ourselves on an exceptional level of service.

REDUCED LEAD TIMES
We're closer to you than ever before and ready to fill your order!

THE RIGHT PRODUCTS
Some of our most popular products and sizes - shipped from our Carson City Facility!

QUALITY & SATISFACTION
Stop wasting your time with the other guys and start trusting your Division 8 provider.

FEATURING OUR

PRODUCT CATEGORIES

SEALS

Thresholds · Gasketing
Door Bottoms

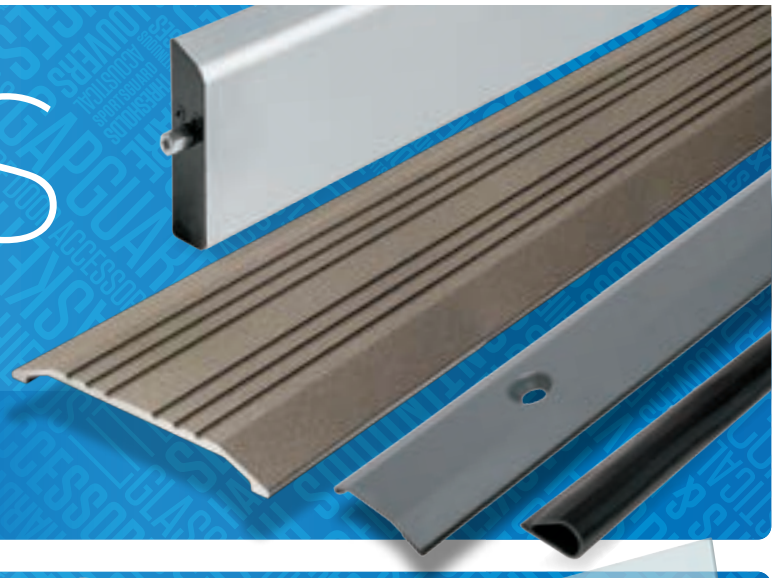

FEATURING

GAPGUARD
FIRE DOOR ACCESSORIES

LITES & GLASS

Lite Kits · Louvers
Fire, Safety & Specialty Glass

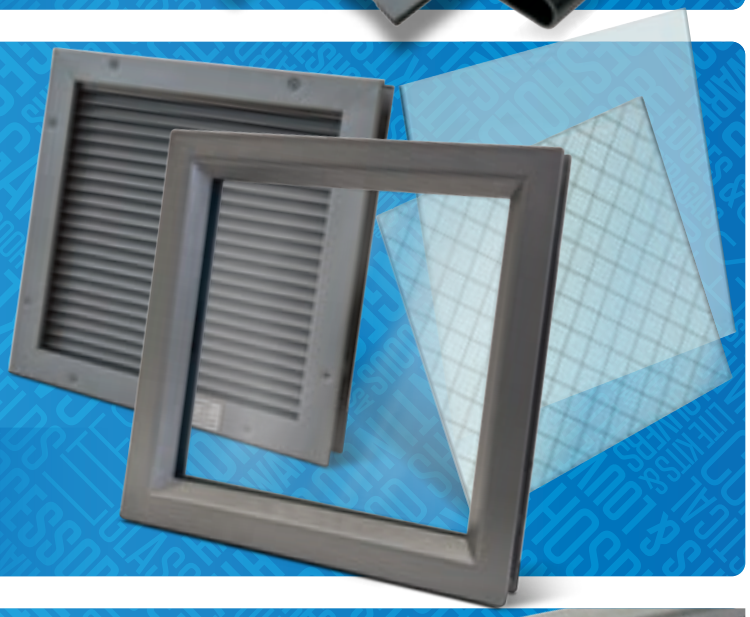

FEATURING

Anemostat
DOOR PRODUCTS

PYRAN® PLATINUM F
& FIRELITE® NT

HINGES & TRACK

Aluminum & Stainless Steel
Continuous Hinges

Aluminum, Steel & Stainless Steel
Track Hardware

CONDENSED CATALOG INDEX

Bumper Seal Thresholds 5
Concealed Fastener Seals 10
Continuous Hinge, Aluminum Geared
- Concealed 22
- Full Surface 22

Continuous Hinge, Stainless Steel
- Concealed 23

Cover Plates 6
Finger Guard 19
Flood Shield 19
GAPGUARD 28-30
Gasketing
- Adjustable Perimeter Seals 12
- Astragals 12
- Automatic Door Bottoms 13
- Door Shoes 16
- Door Sweeps 15
- Nylon Brush Seals with EPDM Rubber 14
- Perimeter Seals 11

Glass 21
Half Saddle Thresholds 7
Heavy-Duty Thresholds 6
Hospitality
- Door Bottoms, Door Shoes, Door Guards 18
- Security Door Guard 18
- Vinyl Thresholds, Smoke Seal 17

Lite Kits & Louvers 20
Offset Saddle Thresholds 7
Saddle Thresholds 5
Self-Adhesive Gasketing 9
Sliding Door Hardware
- By-Pass, Bi-Fold 24
- By-Pass, Side Wall Mount 25
- Pocket Door/Frame Kit 26
- Stainless Steel 27

Stainless Steel Saddle 8
Thermal Break Thresholds 8

NUMERICAL INDEX

12T6 16
12V 16
20T 21
36ET 18
97V 15
101V 15
103N 12
107 12
110 11
115N 12
137 11
155 11
158 12
160 11
170 10
172 10
200 15
220 13
319EV 16
320 13
324 7
325 7
335NA 18
400 17
401 17
413 5
420N 13
423NA 13
423STC 13
424E 5
425E 5
425HD 6
426E 5
427E 5
428E 5
429E 5
430E 5
434 5
435 5
436 5
437 5
438 5
439 5
440 5
512SS 8
513 5
513HD 6
513SS 8
A605 11
613 5
A626 11
C627 15
653 7
659 7
672 10
675 . . . . . 10, 15
D690 14
C697 14
D698 14
C699 12
700 11
713 5
813 5
814 6
814SS 6
818 6
818SS 6
838 6
896 5
896HD 6
913 5
950 5
1013 5
2248 19
2252 19
5050 9
5060 9
5070 9
5075 . . . . . 9, 17
8424 8
8425 8
8426 8
8427 8
8428 8
8429 8
8430 8
9200 29
9245VA 29
9245WH 29
9590 29
9990 28
AFDL 20
FP180-225 29
FS10 19
FS22 19
FS34 19
FSSP 19
GAP90 28
GAP90-ME 28
GAP90N 28
GAPGUARD
FIRE CAULK 29
HD1100 22
HD2400 22
HD5700 22
L-700-RX 20
L-CVFM-SS 20
L-FRA100 20
L-ITG-1" 21
L-LAMI-1/4" 21
LO-PRO 20
L-TG-1/4" 21
PROTECT3™ 21
PYRAN® PLATINUM F 21
SDG 18
SLAL-250-BP 25
SLAL-250-PD 26
SLAL-250-PDKIT 26
SLAL-250-SW 25
SLAL-75-BF 24
SLAL-75-BP 24
SLAL-75-BPF 24
SLSS1 27
SLSS2 27
SS300 23

TECHNICAL INFORMATION

RATING SYMBOLS LEGEND

POSITIVE PRESSURE - CERTIFIED by UL to ANSI/UL10C Complies with IBC, NFPA 80 and NFPA 252 for application to hollow metal fire doors rated up to 3 hours, and wood fire doors rated up to 90 minutes (some ratings vary as noted).

CERTIFIED by UL to CAN/ULC-S104 and ANSI/UL10B Complies with NFPA 80 and NFPA 252 for application to hollow metal fire doors rated up to 3 hours, and wood fire doors rated up to 90 minutes (some ratings vary as noted).

NGP-EDGE® SEALING SYSTEM, CERTIFIED by UL to ANSI/UL10C Category 'G' Required for Category B wood fire doors to meet positive pressure requirements complying with IBC, and NFPA 252. See individual products for maximum door size and ratings.

SMOKE & DRAFT CONTROL GASKETING, CERTIFIED by UL to ANSI/UL10C and ANSI/UL 1784 Category 'H' Complies with IBC and NFPA 105 for use on 'S' labeled positive pressure hollow metal fire doors rated up to 3 hours, and wood fire doors rated up to 90 minutes (some ratings vary as noted).

ACOUSTICAL TESTED to ASTM E90 Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements, ASTM E413 Classification for Rating Sound Insulation, and ASTM E1332 Classification for Outdoor-Indoor Sound Attenuation.

AIR INFILTRATION Recommended product for minimum air leakage and a tight seal around the perimeter of doors.

ANSI/BHMA CERTIFIED Certified gasketing complies with American National Standard for Door Gasketing and Edge Seal Systems ANSI/BHMA A156.22, and is listed in the BHMA Certified Products Directory.

Online product listings: ul.com/database

BUY AMERICAN

REQUIREMENTS

Buy American Act

Over 99% of our products are produced in the United States as a domestic construction material, as defined in the Buy American Act (BAA) of March 1933 and amended by the Buy American Act of 1988 and FAR 52.225-9. A Buy American certificate may be obtained on our website ngp.com.

Build America, Buy America Act

Most of our products comply with Build America, Buy America Act requirements under Title IX of the Infrastructure Investment and Jobs Act (IIJA), Pub. L. 117-58, §§ 70901-70953. Contact us for a Certificate of Compliance for products being supplied on your project.

© NGP, Inc. 2026

SADDLE THRESHOLDS

All Products In This Section

PART #		WIDTH
413*	434	4"
513*	435	5"
613*	436	6"
713*	437	7"
813*	438	8"
913	439	9"
1013	440	10"

PART #	WIDTH
424E	4"
425E	5"
426E	6"
427E	7"
428E	8"
429E	9"
430E	10"

NOTE: Flute Patterns Vary with Width of Threshold

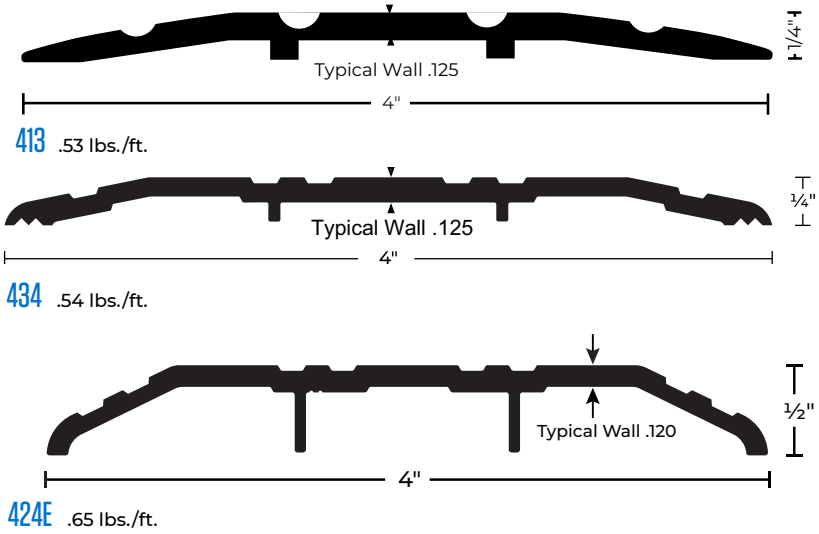

ALUMINUM FINISHES

- Mill
- B - Black Anodized
- DKB - Dark Bronze
- BR: Bronze (*Indicates if Available)

CROSS REFERENCE

NGP	413	513	613	713	813	913	1013	424E	425E	426E	427E	428E	429E	430E
PEMKO	270	271	272	276	2748	2749	2750	170	171	172	176	2548	2549	2550
ZERO	544	545	546	547	548	--	--	--	8655	--	6570	--	--	--
HAGER	403S	413S	417S	430S	428S	--	448S	404S	412S	415S	416S	426S	--	--
KN CROWDER	CT-64	CT-65	CT-66	CT-67	CT-68	CT-69	CT-610	CT-9	CT-10	CT-11	CT-12	CT-32	CT-909	CT-910

ADA COMPLIANT

BUMPER SEAL THRESHOLDS

All Products In This Section

PART #	WIDTH
896	5"
950	5"

CROSS REFERENCE

NGP	896	950
PEMKO	2005	2001
ZERO	65	566
HAGER	520S	477S
KN CROWDER	CT-72	CT-70

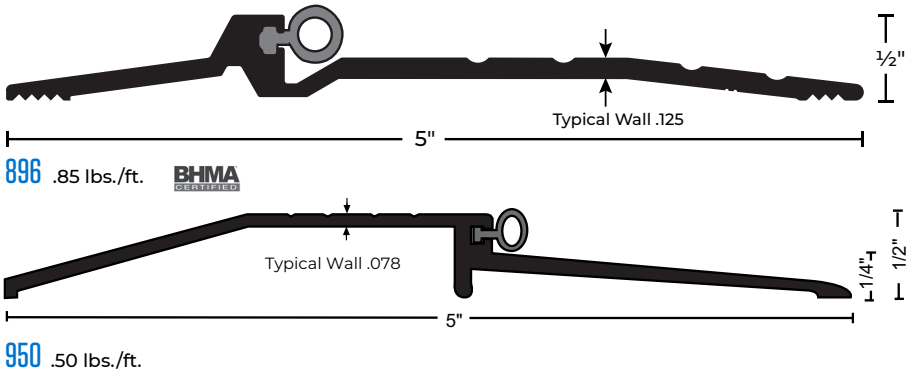

ALUMINUM FINISHES

- Mill
- B - Black Anodized
- DKB - Dark Bronze

OPTIONAL: SIA: SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority

FASTENERS

- #10 x 1-½" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB

BUMPER SEAL

Seals Against the Door, Providing Weather Resistance

BUMPER SEAL OPTIONS	
V	Vinyl**
N	Neoprene
S	Silicone

***Vinyl ("V") Supplied Unless Other Material Specified*

HEAVY-DUTY THRESHOLDS

All Products In This Section

- For Use Where Forklift or Vehicular Traffic Occurs
- Recommended for Delivery/Storage Doorways Where Heavier Loads Travel
- BHMA Certified to ANSI A156.21 Heavy Duty 10,000 lb. Load Test
- Optional SIA Slip-Resistant Finish Recommended in Moisture-Prone Areas

PART #	WIDTH
425HD	5"
513HD	5"
896HD	5"

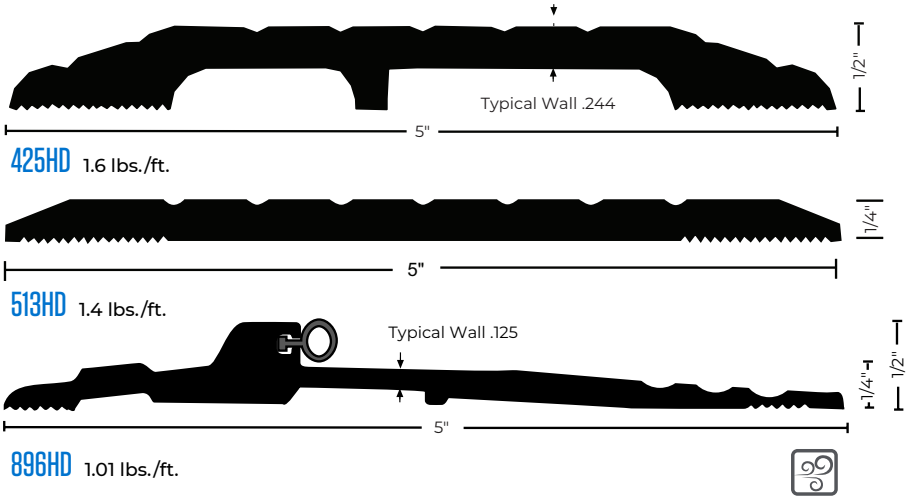

ALUMINUM FINISHES

- Mill
- B - Black Anodized
- DKB - Dark Bronze

BUMPER SEAL

Seals Against the Door, Providing Weather Resistance

BUMPER SEAL OPTIONS	
V	Vinyl**
N	Neoprene
S	Silicone

***Vinyl ("V") Supplied Unless Other Material Specified*

CROSS REFERENCE

NGP	425HD	513HD	896HD
PEMKO	1715	2715	2705-T
HAGER	427S	–	–

COVER PLATES

All Products In This Section

PART #	MAX WIDTH
818	48"
818SS	48"
814	48"
814SS	48"
838	48"

ALUMINUM FINISHES

- Mill
- B - Black Anodized
- DKB - Dark Bronze

OPTIONAL:

SIA: SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority

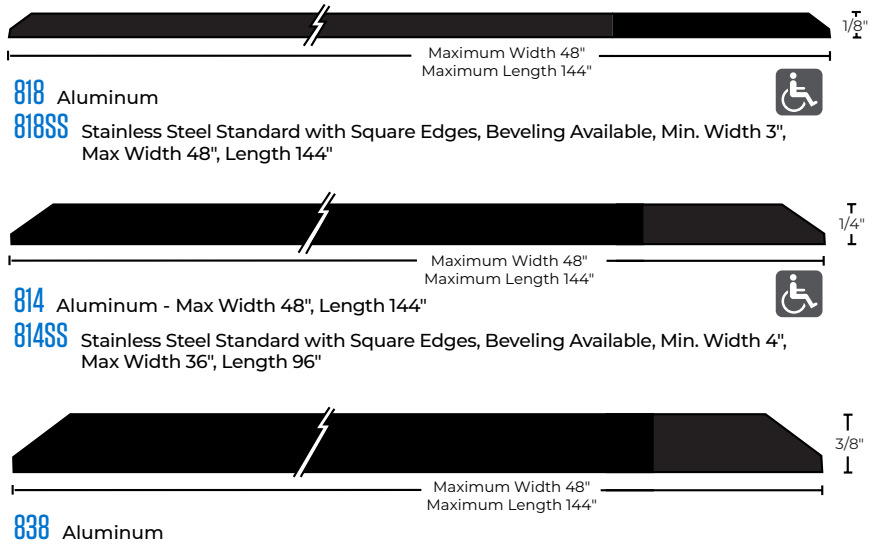

CROSS REFERENCE

NGP	818	818SS	814	814SS	838
PEMKO	18/1A	–	14/1A	–	–
ZERO	600CP	–	601CP	–	–
HAGER	676S	–	677S	–	–

HALF SADDLE THRESHOLDS

All Products In This Section

PART #	WIDTH
324	4"
325	5"

* *When Installed with the Non-Beveled Edge Flush with Flooring or Where No Greater Than ¼" Vertical Rise Occurs.*

CROSS REFERENCE

NGP	324	325
PEMKO	227	229
ZERO	1674	1675
HAGER	432S	431S

NOTE: Flute Patterns Vary with Width of Threshold

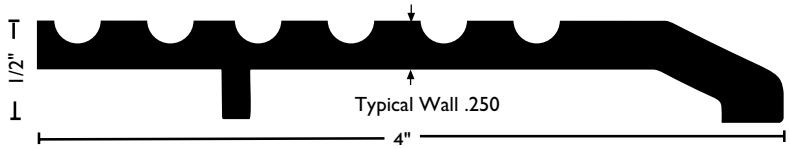

324 1.20 lbs./ft.

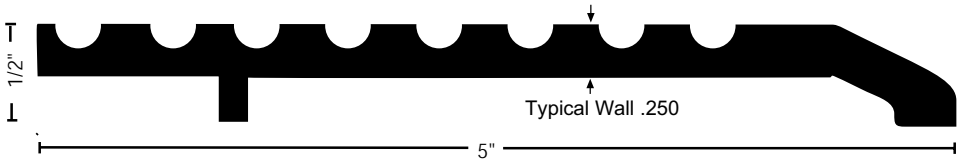

325 1.32 lbs./ft.

ALUMINUM FINISHES
- Mill
- B - Black Anodized
- DKB - Dark Bronze

OFFSET SADDLE THRESHOLDS

All Products In This Section

PART #	WIDTH
653	5½"
659	7"

CROSS REFERENCE

NGP	653	659
PEMKO	158	2727
ZERO	211	103
HAGER	438S	–

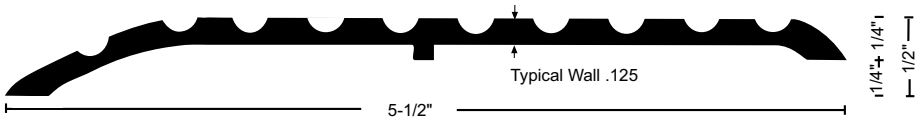

653 .78 lbs./ft.

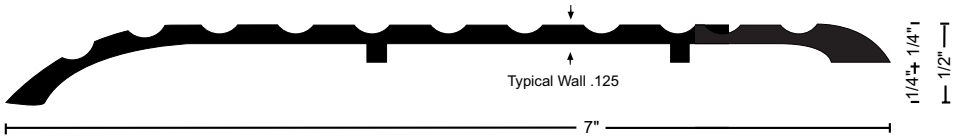

659 .89 lbs./ft.

ALUMINUM FINISHES
- Mill
- B - Black Anodized
- DKB - Dark Bronze

OPTIONAL:
SIA: SLIP-RESISTANT FINISH
For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority

All Products In This Section

THERMAL BREAK THRESHOLDS

PART #	WIDTH
8424	4"
8425	5"
8426	6"
8427	7"
8428	8"
8429	9"
8430	10"

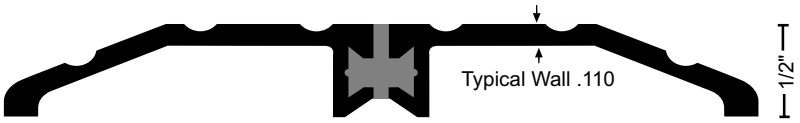

ALUMINUM FINISHES

- Mill
- B - Black Anodized
- DKB - Dark Bronze

OPTIONAL:

SIA: SLIP-RESISTANT FINISH
For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority

CROSS REFERENCE

NGP	8424	8425	8426	8427	8428	8429	8430
PEMKO	252 x 2_FG	252 x 3_FG	253 x 3_FG	253 x 4_FG	254 x 4_FG	254 x 5_FG	255 x 5_FG
ZERO	624	625	626	--	--	--	--
HAGER	420S	421S	422S	423S	424S	451S	452S
KN CROWDER	CT-44	CT-45	CT-46, CT-406	CT-407	CT-408	CT-409	CT-410

All Products In This Section

STAINLESS STEEL SADDLE

PART #	WIDTH
513SS	5"
512SS	5"

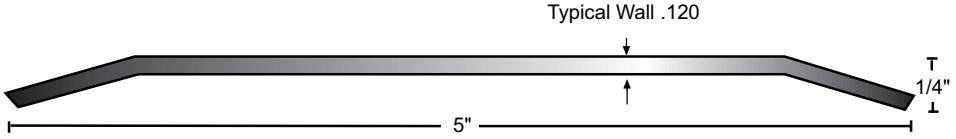

513SS 2.07 lbs./ft.

Available in 4" to 10" width.
1st digit = width (eg., 4" = 413SS)

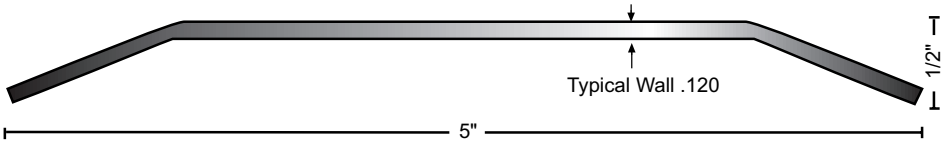

512SS 2.07 lbs./ft.

Available in 4" to 10" width.
1st digit = width (eg., 4" = 412SS)

CROSS REFERENCE

NGP	513SS	512SS
PEMKO	–	154SS
HAGER	–	412S-32D
KN CROWDER	–	CT-10SS

MATERIALS & FINISHES

- #304 Mill Finish Standard
- Available: Polished (US32)
  Brushed (US32D)

SELF-ADHESIVE GASKETING

All Products In This Section

SILICONE BULB FIRE AND SMOKE SEAL

PART #	COLORS
5050B	BROWN
5050C	CHARCOAL
5050W	WHITE
5050CL*	CLEAR

Available in 17', 20', 21', 25' and 300' Rolls*
**Clear Not Available in 300' Rolls*



5050

STC 33

SILICONE FIN SMOKE SEAL

PART #	COLORS
5060C	CHARCOAL

Available in 17', 20' and 21' Rolls



5060

STC 52

SILICONE DOUBLE SHARK FIN SMOKE SEAL

PART #	COLORS
5070B	BROWN
5070CL	CLEAR

Available in 4', 7', 8' and 9' Lengths Smoke Rated for Perimeter and/or Meeting Edge (Astragal) Applications.



5070

SILICONE TRIPLE FIN SMOKE SEAL

PART #	COLORS
5075C	CHARCOAL
5075CL	CLEAR**
5075W	WHITE*

Available in 17', 20', 21', 25" and 300'** Rolls*
**White Only Available in 17' Rolls*
***Clear Unavailable in 300' Rolls*



5075

STC 52

CROSS REFERENCE

NGP	5050	5060	5070	5075
PEMKO	S88	S77	S772	S773
ZERO	188S	–	8217S-BK	8150S-BK
HAGER	726	737	739	738S
KN CROWDER	W-22	–	–	W-63

EDGE SEALING SYSTEM:
Category "G" for 20 Minute Rated Category B Wood Doors Perimeter Application Up To:
Single Swing 4'0 X 8'0
Pairs 8'0 X 8'0
Use 9800 at the Meeting Edge of Pairs

SMOKE AND DRAFT CONTROL - CATEGORY "H":
Up to 3 Hours Hollow Metal Fire Doors
Up to 90 Minutes Wood Fire Doors
Meets Requirements of RoHS Directive
Use 5070 at the Meeting Edge of Pairs

CONCEALED FASTENER SEALS

- Snap-On Cover Conceals Screw Heads for Clean Appearance
- #6 X ¾" Stainless Steel Sheet Metal Screws Furnished
- Screw Holes Slotted for Adjustment

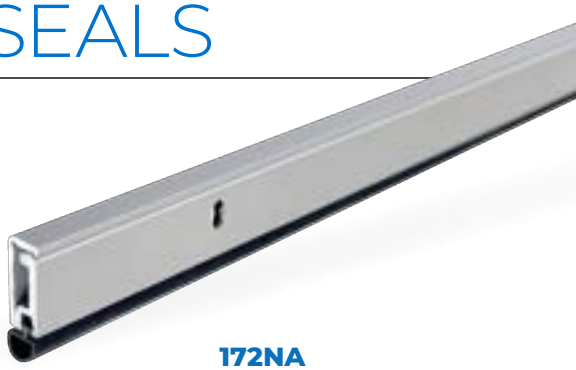

172NA

Anodized Aluminum Neoprene Perimeter Seal with Concealed Fastener

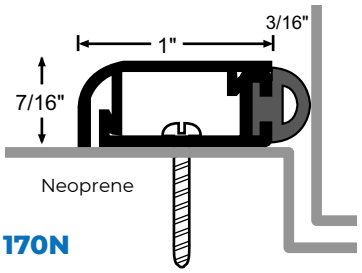

170N

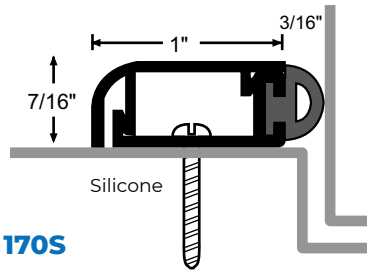

170S

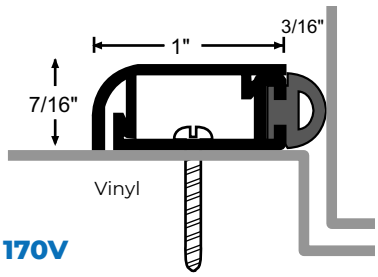

170V

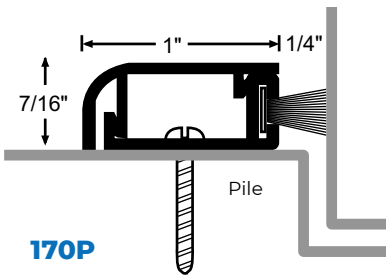

170P

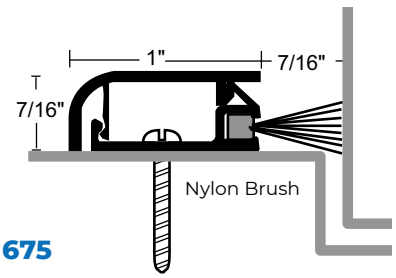

675

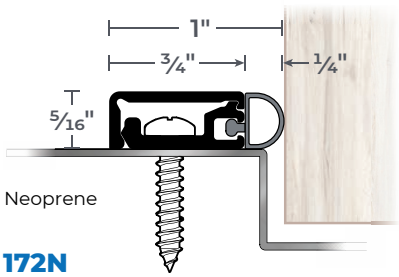

172N

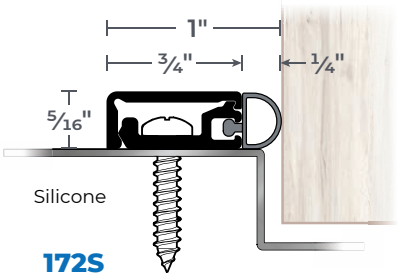

172S

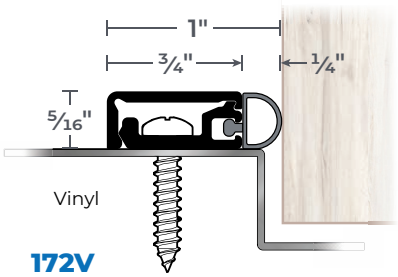

172V



672N

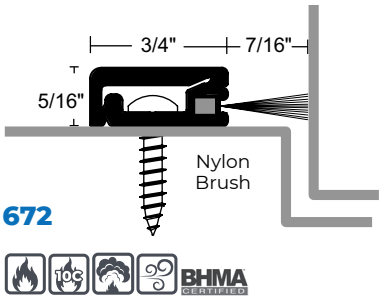

672

ALUMINUM FINISHES

- A - Clear Anodized
- B - Black Anodized
- DKB - Dark Bronze

CROSS REFERENCE

NGP	170N	170S	170V	170P	675	172N	172S	172V	672N	672
PEMKO	29310	--	--	--	29324	--	--	--	29324 _NB	--
ZERO	--	--	--	--	--	475, 8878	--	--	8142, 8879	8879
HAGER	885SN	885SS	885SV	885SW	882S	--	--	--	884SV	--
KN CROWDER	W-32N	W-32S	--	W-32P	--	--	--	--	--	--

GASKETING

All Products In This Section

PERIMETER SEALS

110N
Aluminum Neoprene Sponge Seal

- Neoprene is Black



110S
Aluminum Silicone Sponge Seal

- Silicone

137N
Aluminum Neoprene Sponge Seal

- Neoprene

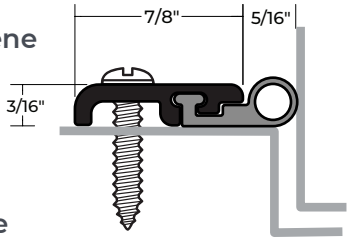

137S
Aluminum Silicone Sponge Seal

- Silicone

155S
Aluminum Silicone Bulb Perimeter Seal

- Dense Silicone



155V
Aluminum Vinyl Perimeter Seal

- Vinyl

160V
Aluminum Vinyl Perimeter Seal

- Vinyl



160S
Aluminum Silicone Bulb Perimeter Seal

- Silicone

700N
Compatible with Parallel Arm Closers

- Neoprene

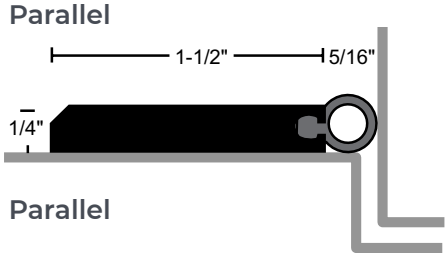

700S
Compatible with Parallel Arm Closers

- Silicone

A605
Aluminum Nylon Brush Seal

- Nylon Brush



A626
Aluminum Nylon Brush Seal

- Nylon Brush



ALUMINUM FINISHES
- No Suffix - Mill
- A - Clear Anodized
- B - Black Anodized
- DKB - Dark Bronze

CROSS REFERENCE

NGP	110	137N	137S	155	160V	160S	700N	700S	A605	A626
PEMKO	332	319_E	--	--	303_V	303_S		2891-S	18041	45041
ZERO	--	326, 328	--	--	--	--	429	--	8193, 8304	--
HAGER	873S	862S	--		891SV	--	--	--	893S	803S
KN CROWDER	--	W-50S	W-50S	W-2	W-1	W-16	--	--	W-25S	W-23

GASKETING

All Products In This Section

ASTRAGALS

158N
Aluminum Overlapping Astragal with Neoprene Seal

- Neoprene

158V
Aluminum Overlapping Astragal with Vinyl Seal

- Vinyl

158S
Aluminum Overlapping Astragal with Silicone Seal

- Silicone

158P
Aluminum Overlapping Astragal with Polypropylene Pile Seal

- Polypropylene Pile

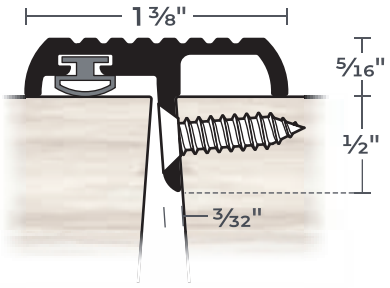

ALUMINUM FINISHES
- A - Clear Anodized
- B - Black Anodized
- DKB - Dark Bronze

115N
Fire-Rated Aluminum Astragal with EPDM Seal

METAL	EPDM
A - Anodized Aluminum	Black
B - Aluminum Black Anodized	Black
DKB - Aluminum Dark Bronze	Black
No Suffix - Mill Aluminum	Black

-BB = Black Brush

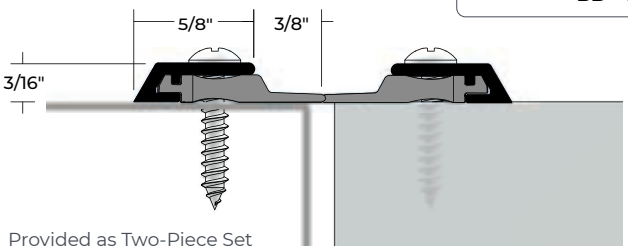

Provided as Two-Piece Set

CROSS REFERENCE

NGP	158	115
PEMKO	355	329_N
ZERO	41, 383	8194
HAGER	837S	872S
KN CROWDER	W-9	W-5

All Products In This Section

ADJUSTABLE PERIMETER SEALS

103N
Aluminum Adjustable Neoprene Perimeter Seal

- Neoprene

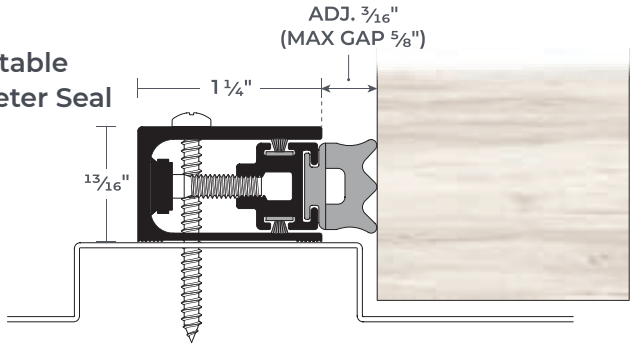

107N
Aluminum Adjustable Neoprene Perimeter Seal

- Neoprene

107S
Aluminum Adjustable Silicone Perimeter Seal

- Silicone

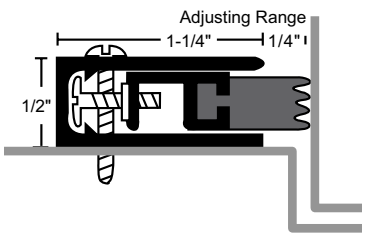

ALUMINUM FINISHES
- A - Clear Anodized
- B - Black Anodized
- DKB - Dark Bronze

OPTIONS:
- Foam Back Seal - Suffix 'FS'
- FATT - Fast Attach Tape

CROSS REFERENCE

NGP	103	107
PEMKO	350_S	379
ZERO	170	--
HAGER	865S	864S
KN CROWDER	--	W-42

GASKETING

AUTOMATIC DOOR BOTTOMS

220N
Aluminum Surface Automatic Door Bottom with Neoprene Seal

- Neoprene is Black

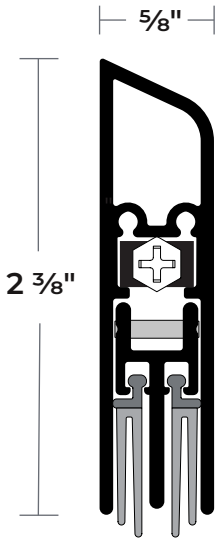

220S
Aluminum Surface Automatic Door Bottom with Silicone Seal

- Silicone is Black

220WH
Aluminum Surface Automatic Door Bottom with Nylon Brush Seal

- Aluminum Finish - *Gray Brush*
  Aluminum Dark Bronze/Black Anodized Finish - *Black Brush*

Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided.

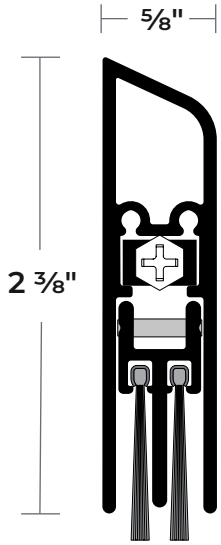

320NA
Clear Anodized Aluminum Automatic Door Bottom for Hollow Metal Doors

- Neoprene is Black

320SA
Clear Anodized Aluminum Automatic Door Bottom for Hollow Metal Doors

- Silicone is Black

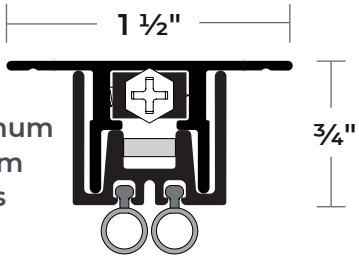

320VA
Clear Anodized Aluminum Automatic Door Bottom for Hollow Metal Doors

- Vinyl is Black

ALUMINUM FINISHES
- A - Clear Anodized
- B - Black Anodized
- DKB - Dark Bronze

420N
Aluminum Heavy-Duty Surface Automatic Door Bottom with Neoprene Seal

- Neoprene is Black

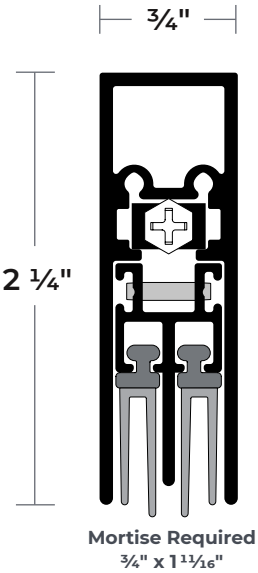

423NA
Mill Aluminum Heavy-Duty Mortise Automatic Door Bottom

- Neoprene is Black

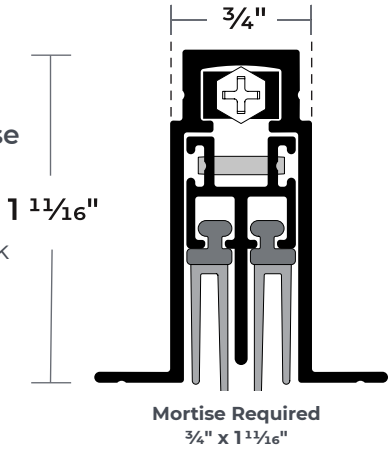

423STC
Mill Aluminum Heavy-Duty Mortise Automatic Door Bottom

STC 52

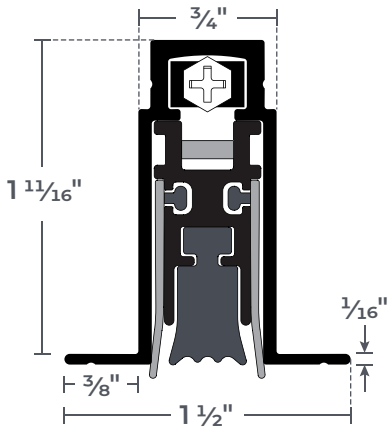

CROSS REFERENCE

NGP	220	420N	423NA	320
PEMKO	--	430	434	420
ZERO	--	361	360	355
HAGER	321	747S	743S	
KN CROWDER	--	CT-52	CT-53	742SN, 742SV

GASKETING

NYLON BRUSH SEALS WITH EPDM RUBBER INSERT

- EPDM Rubber Insert Protects Against Water Penetration and Provides an Effective Bottom Seal for Exterior Doors
- Excellent Abrasion Resistance, Flexibility and Memory
- Moisture-Resistant
- Retains Insecticides Well
- Temperature Range - 60°F to 300°F
- #6 x 3/4" Stainless Steel SMS Furnished
- Screw Holes Slotted for Adjustment

PRODUCT# SUFFIX	FINISH
A	Clear Anodized with Black Brush
B	Black Anodized with Black Brush
DKB	Aluminum Dark Bronze with Black Brush



C697

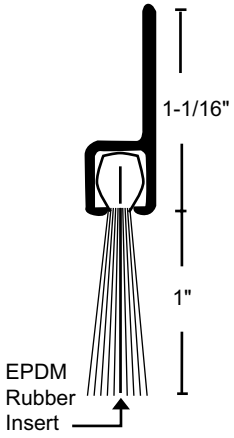

D698

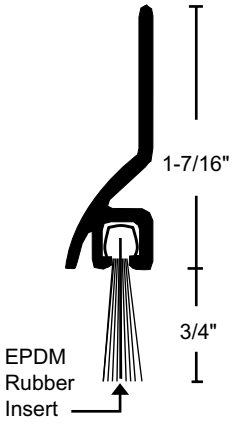

C699

GASKETING

DOOR SWEEPS

C627 BHMA CERTIFIED
Nylon Brush Sweep

- Aluminum Finish - *Gray Brush*
  Aluminum Dark Bronze/Black Anodized Finish - *Black Brush*



97V
Vinyl Sweep

- Vinyl is Black

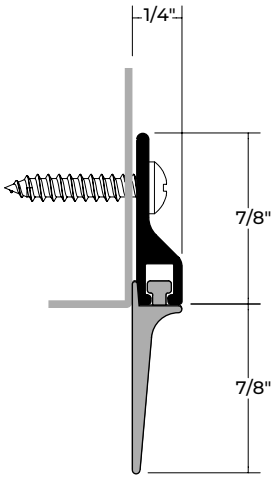

675 BHMA CERTIFIED
Concealed Fastener Nylon Brush Perimeter Seal or Sweep

- Aluminum Finish - *Gray Brush*
  Aluminum Dark Bronze/Black Anodized Finish - *Black Brush*



200N BHMA CERTIFIED
Aluminum Neoprene Door Sweep

200S BHMA CERTIFIED
Aluminum Silicone Door Sweep

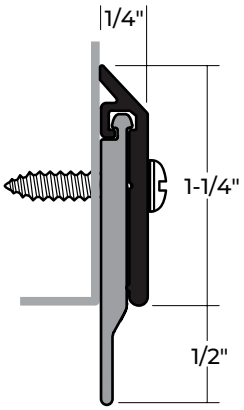

101V
Aluminum Vinyl Door Sweep

- Vinyl is Black

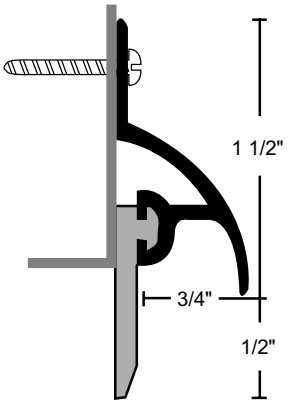

CROSS REFERENCE

NGP	C627	97V	675	200	101V
PEMKO	345_NB	307	29324	315_N	345_V
ZERO	8198	8191	–	50M/39	8197
HAGER	770SB	756S	882S	750S	770SV
KN CROWDER	W-35-1	W-4	–	W-13S, W-38S	–

FINISHES
- No Suffix - Mill
- A - Clear Anodized
- B - Black Anodized
- DKB - Dark Bronze

GASKETING

DOOR SHOES

12V

Aluminum Smooth Vinyl Door Shoe

- Vinyl is Black



319EV

Aluminum Finned Vinyl Door Shoe

- Vinyl is Black

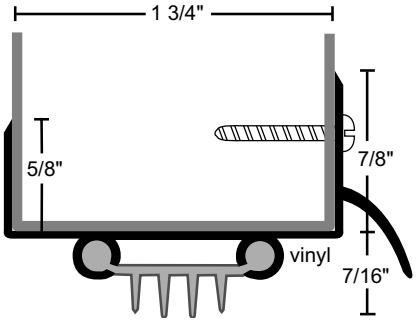

12T6

Aluminum Thermoplastic Door Shoe

- Thermoplastic is Dark Brown

STC 52
Requires STC-FH Option

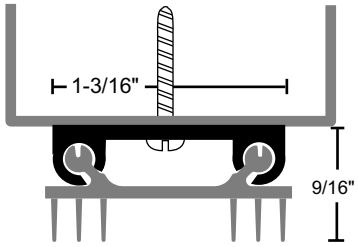

CROSS REFERENCE

NGP	12V	319EV	12T6
PEMKO	208_V	216	3692_PK773
HAGER	–	778SV	–
KN CROWDER	–	CT-745	–

FINISHES

- No Suffix -
- B - Black Anodized
- DKB - Dark Bronze

HOSPITALITY

VINYL THRESHOLDS, SMOKE SEAL

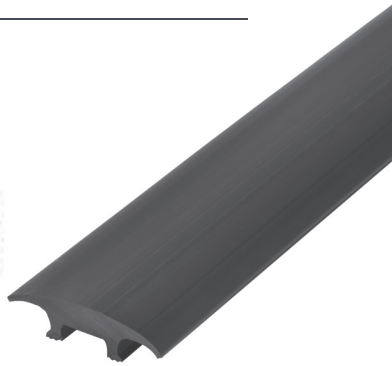

401

Hospitality Vinyl Carpet/Tile Divider Threshold

- Vinyl is Black

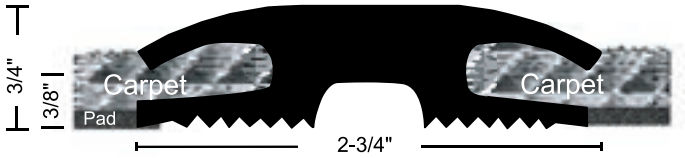

* When Installed as Illustrated Between Carpet and/or Tile

400

Hospitality Vinyl Carpet/Tile Divider Threshold

- May be Field Trimmed for Narrower Widths
  Max Length = 73"
- Vinyl is Black

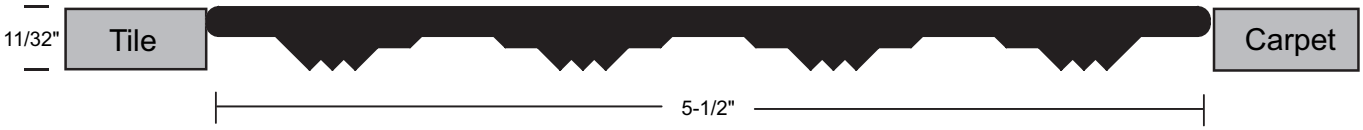

* When Installed as Illustrated Between Carpet and/or Tile

5075

Silicone Triple Fin Smoke Seal

PART #	COLORS
5075C	CHARCOAL
5075CL	CLEAR**
5075W	WHITE*

Available in 17', 20', 21', 25" and 300'** Rolls*
**White Only Available in 17' Rolls*
***Clear Unavailable in 300' Rolls*



STC 52

CROSS REFERENCE

NGP	401	400	5075
PEMKO	EV232BL	--	S773
ZERO	1685	--	8150S-BK
HAGER	900S	905S	738S
KN CROWDER	–	--	W-63

HOSPITALITY

DOOR BOTTOMS, DOOR SHOES, DOOR GUARDS

335NA

Mortise Automatic Door Bottom with Neoprene Seal

- Minimum Length 11 ½", Maximum Length 60"
- Fits Wood Fire Door Mortise Restrictions
- Neoprene is Black

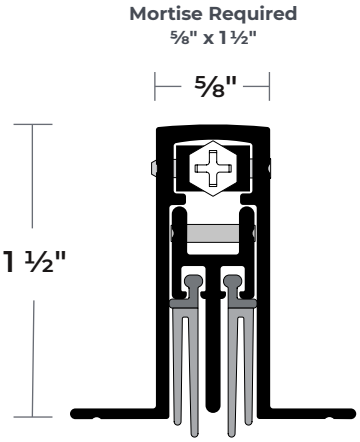

36ET

Thermoplastic Door Shoe

- Thermoplastic is Dark Brown

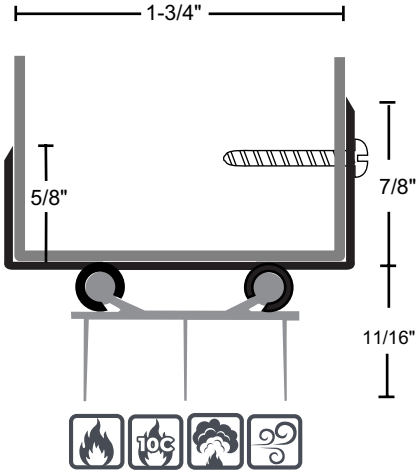

SDG

Security Door Guard

PART #	COLORS
SDG-3	POLISHED BRASS US3
SDG-4	SATIN BRASS US4
SDG-10B	DARK BRONZE US10B
SDG-26	POLISHED CHROME US26
SDG-26D	SATIN CHROME US26D
SDG-DS*	STICKER FOR RETROFIT
SDG-WS*	STICKER FOR RETROFIT

**Covers Holes Left in Door and Frame from Removal of Swing-Bar Type Door Guards*

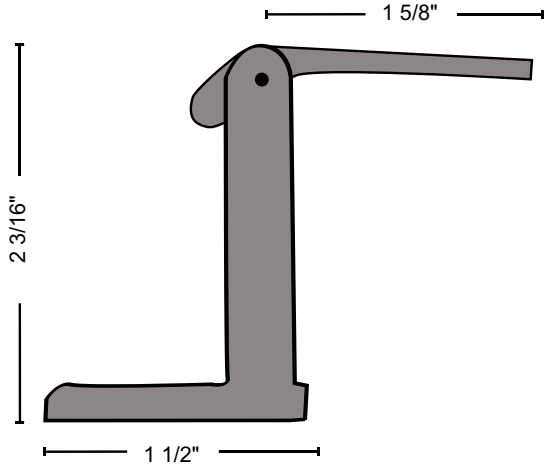



SDG-DS **SDG-WS**

CROSS REFERENCE

NGP	335NA	36ET	SDG
PEMKO	411	--	PDL
ZERO	320	--	--
KN CROWDER	CT-51	--	--

FINGER GUARD

Prevent Injury to Fingers Accidentally Placed in the Hinge Area of a Door

- Ideal for Senior & Childcare Facilities
- Anodized Aluminum Housing
- Durable “Endless Cycle” Spring Mechanism
- Mounts on Push Side of Door

2248

PART #	MATERIAL
2248	Aluminum Clear Anodized W/ White Polyethylene
2248B	Black Anodized W/ Black Polyethylene
2248DKB	Dark Bronze W/ Black Polyethylene

Rated Up to 3 Hours Metal Doors, 1 Hour Wood Doors

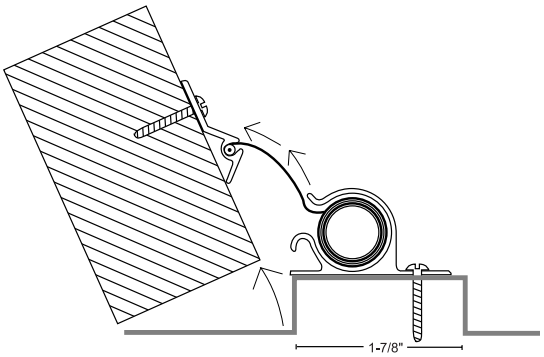

Details Not to Scale

HINGE SIDE FINGER GUARD

- Available in Brown, Charcoal and White
- 83'' Length
- Can Be Cut in the Field
- Mounts on Pull Side of Door
- #6 X ½'' Tek Self-Drilling Screws

PART #	COLOR
2252C	CHARCOAL
2252W	WHITE

2252

Rated Up to 3 Hours Metal Doors, 1½ Hours Wood Doors

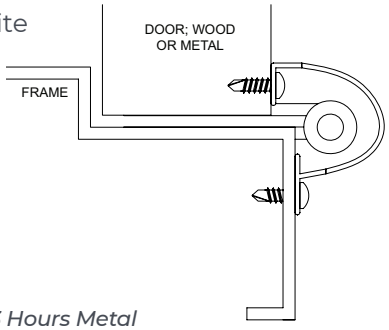

CROSS REFERENCE

NGP	2248	2252
ZERO	--	951, 972, 974

FLOOD SHIELD

- ¼" Marine Grade Aluminum Shield with Handle Cutouts
- Closed Cell Neoprene Rubber Gaskets Installed on Bottom and Sides of Shield
- Anodized Aluminum Mounting Channels
- Universal Channels can Install Inside or Outside Mount
- Stainless Steel Springs Provide Seal Compression
- Complies with Guidelines of the Federal Emergency Management Agency (FEMA) and Federal Insurance and Mitigation Administration (FIMA) for Use on Doors in Flood Prone Areas
- Lengths Up To 96" Available
- A Center Support Post is Recommended for Installations Over 50"
- Orders for this Product are Non-Changeable and Non-Cancellable

PART #	HEIGHT	
FS10	12" High	With 10" of Flood Protection
FS22	24" High	With 22" of Flood Protection
FS34	36" High	With 34" of Flood Protection

MOUNTING CHANNEL



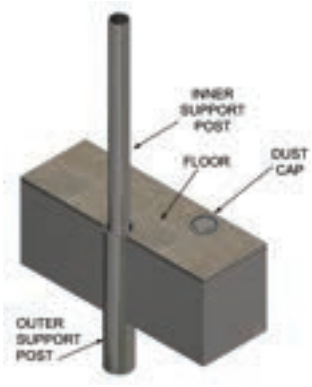

FSSP *Optional Center Support & Cap*

CROSS REFERENCE

NGP	FS10	FS22	FS34	FSSP
ZERO	2070A-10	2070A-24	2070A-36	--

LITE KITS & LOUVERS

L-FRA100
Low Profile Lite Kit

- For 1¾" Thick Doors and 3⁄16", ¼", or 5⁄16" Glass
- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Gray Primer (GPZ) Powder Coat Finish Standard

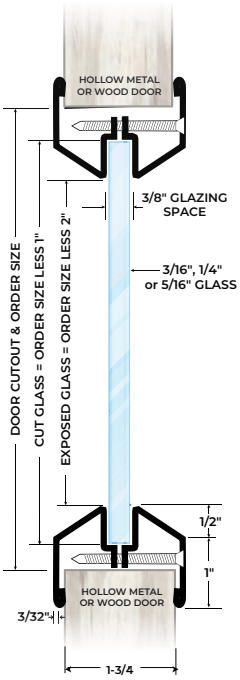

L-CVFM-SS
Stainless Steel Lite Kit

- For 1¾" Thick Doors and 3⁄16", ¼", or 5⁄16" Glass
- 18 Ga. Type 304 Stainless Steel
- Mitered and Welded Corners
- #4 Satin Finish

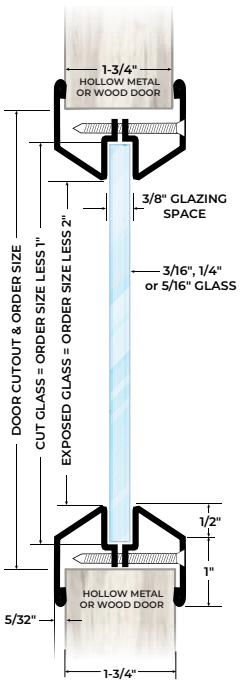

Anemostat
DOOR PRODUCTS

LO-PRO
Low Profile Lite Kit

- For 1¾" Thick Doors and 3⁄16", ¼", or 5⁄16" Glass
- 20 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Gray Primer (GPZ) Powder Coat Finish Standard

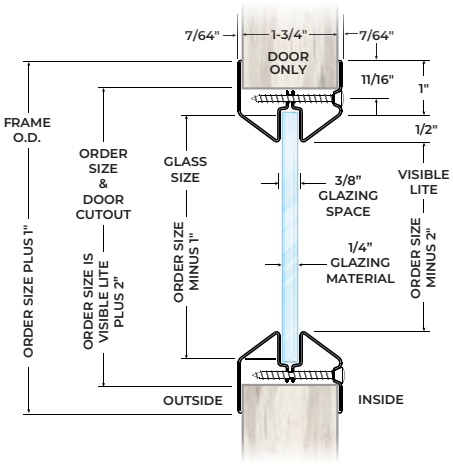

L-700-RX, AFDL
Self-Attaching, No Vision Door Louver

- For 1¾" Thick Doors
- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Inverted "V" Design
- Gray Primer (GPZ) Powder Coat Finish Standard

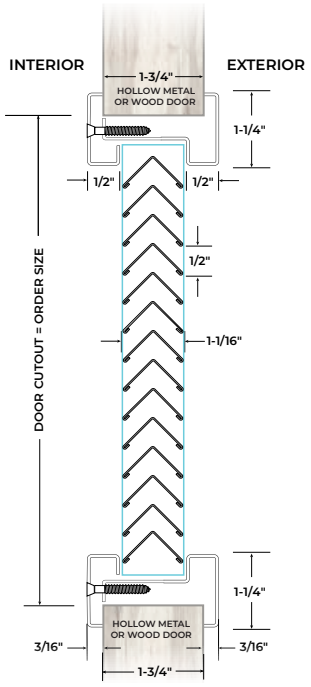

CROSS REFERENCE

NGP	L-FRA100	L-CVFM-SS	L-700-RX	LO-PRO
AIR LOUVERS	VSL	VSL-S	800A1, 600A1	VSL
ROCKWOOD	LT-B1	LT-B1 Stainless Steel	LV-1Y	LT-B1

GLASS

PROTECT3™
Fire-Protective Safety-Wired Glass

- ¼" Thick
- Safety Filmed Wired Glass
- Fire Protective Rated
- Impact Safety-Rated
- Etched With UL Classification
- STC 28



PYRAN® PLATINUM F
Fire-Protective Ceramic Safety Glass

- 3⁄16" Thick
- Safety Filmed Glass Ceramic
- Fire Protective Rated
- Impact Safety-Rated
- Clear & Wireless Glass
- Etched With UL Classification
- STC 31



20T
20-Minute Fire-Protective Glass

- ¼" Thick
- Clear & Wireless, Tempered Glass
- Superior Optical Clarity
- Fire Protective Rated
- Impact Safety-Rated
- Etched With UL Classification
- STC 28



FIRELITE®NT
Fire-Protective Ceramic Safety Glass

- 3⁄16" Thick
- Fire-Rated Safety Film
- Clear and Wireless
- ultraHD® Technology
- Etched With UL Classification
- STC 35



L-TG-1/4"
Tempered Glass - 1/4'' Thick

- ¼" Thick
- Heat Treated Glass
- Impact Safety-Rated
- Clear & Wireless Glass
- STC 31



L-ITG-1
Insulated Tempered Glass - 1" Thick

- 1" Thick
- Composed of Two Pieces ¼" Thick Clear Tempered Glass With ½" Air Space Between and Butyl Seal
- Impact Safety-Rated
- Clear & Wireless Glass
- STC 35

CROSS REFERENCE

PROTECT3	PYRAN® PLATINUM F	20T
WireLiteNT, Wireshield	FireLite® NT	Fireglass 20

CONTINUOUS HINGE

ALUMINUM GEARED

CONCEALED

- Proprietary Teflon Infused Self-Lubricating Wear Resistant Bearings
- No Hinge Reinforcement Necessary Except on Extremely Heavy, Extremely High-Frequency or Extra-Wide Doors
- Lifetime of the Door Opening Warranty
- Standard Lengths: 83", 85", 95", 119"

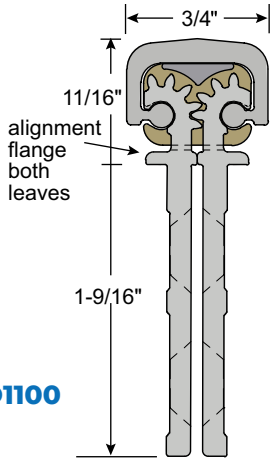

HD1100

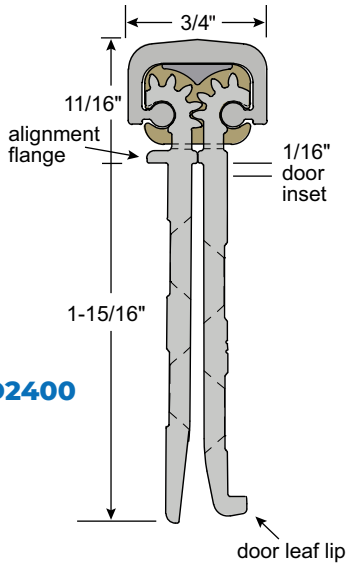

HD2400

FULL SURFACE

- Proprietary Teflon Infused Self-Lubricating Wear Resistant Bearings
- No Hinge Reinforcement Necessary Except on Extremely Heavy, Extremely High-Frequency or Extra-Wide Doors
- Lifetime of the Door Opening Warranty
- Standard Lengths: 83", 85", 95", 119"

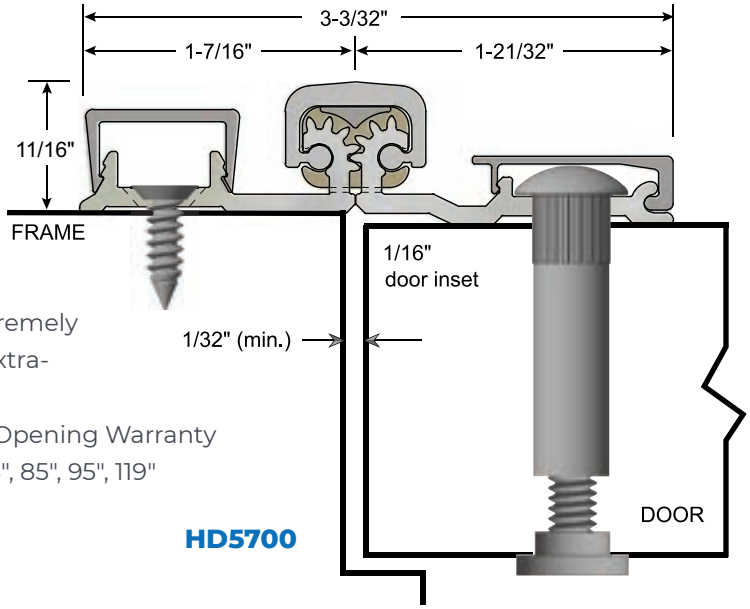

HD5700

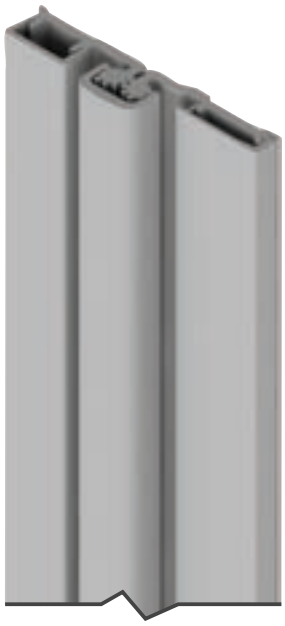

CROSS REFERENCE

NGP	HD1100	HD2400	HD5700
SELECT	SL11 HD	SL24 HD	SL57HD
ROTON	780-112LL	780-224HD	780-057HD
PEMKO	FMSLF-HD1	FM-HD1	FSCP-HD1
STANLEY	661HD	662HD	--
ABH	A110HD	A240HD	A570HD
PBB	CG31	CG31L	CG57
IVES	112HD	224HD	157XY*

**XY Type = Patented Center Load Bearing*

Available Options:

½" Wood Screws
Torx Screws
Cut to Net Length
Anti-Ligature Hospital Tip
Dutch Door Prep
Electric Thru-Wire
Electric Power Transfer Prep
Std. Lengths 83", 85", 95", 119"
Furnished with TEK M.S.

Finishes:
- A - Anodized Aluminum
- B - Black Anodized
- DKB - Dark Bronze Anodized

CONTINUOUS HINGE

STAINLESS STEEL

CONCEALED

14-Gauge Type 304 Stainless Steel Pin and Barrel Design

- Heavy-Duty Type 304, 14-Gauge Stainless Steel
- Pin and Barrel Design
- Stainless Steel Hinge Pins
- Medical Type Self-Lubricating Flanged Bearings Between Each 2" Knuckle Provide Dust-Free Quiet and Smooth Operation
- For Doors Weighing up to 600 lbs.
- 25-Year Warranty
- Standard Lengths: 83", 85", 95", 119"

SS300

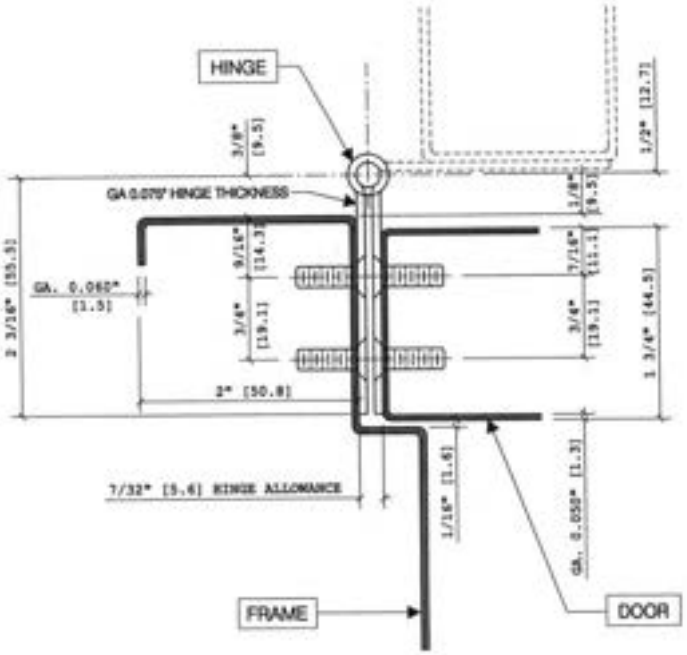

CROSS REFERENCE

NGP	SS300
MARKAR	FM300
SELECT	SL300
HAGAR	790-900
ABH	A500
IVES	700
STANLEY	651
PBB	CH51

Available Options:

½" Wood Screws
Torx Screws
Cut to Net Length
Anti-Ligature Hospital Tip
Dutch Door Prep
Welded Tips
Electric Thru-Wire
Electric Power Transfer Prep
Std. Lengths 83", 85", 95", 119"
Furnished with TEK M.S. Wood Screws

Finishes:
Brushed Stainless Steel US32D (630)

SLIDING DOOR HARDWARE

BY-PASS, BI-FOLD

SLAL-75-BP

Aluminum By-Pass Side Mount Track System

PART #	TRACK LENGTH
SLAL-75-BP-48	48"
SLAL-75-BP-60	60"
SLAL-75-BP-72	72"
SLAL-75-BP-96	96"

SLAL-75-BPF

Aluminum By-Pass Side Mount Track System with Fascia

PART #	TRACK LENGTH
SLAL-75-BPF-48	48"
SLAL-75-BPF-60	60"
SLAL-75-BPF-72	72"
SLAL-75-BPF-96	96"

SLAL-75-BF

Aluminum Bi-Fold Top Mount Track System

TWO-DOOR SYSTEMS

PART #	TRACK LENGTH
SLAL-75-BF2DR-36	36"
SLAL-75-BF2DR-48	48"

FOUR-DOOR SYSTEMS

PART #	TRACK LENGTH
SLAL-75-BF4DR-60	60"
SLAL-75-BF4DR-72	72"
SLAL-75-BF4DR-96	96"

CROSS REFERENCE

NGP	SLAL-75-BP	SLAL-75-BPF	SLAL-75-BF
HAGER	9514	9614	9570
PEMKO	–	–	HF2/100A
STANLEY	BPC60A-00	–	BFC50-00
LE JOHNSON	2200	2200F	100FS
KN CROWDER	C-600	–	CF-100

SLIDING DOOR HARDWARE

BY-PASS, SIDE WALL MOUNT

SLAL-250-BP

Aluminum By-Pass Top Mount Track System

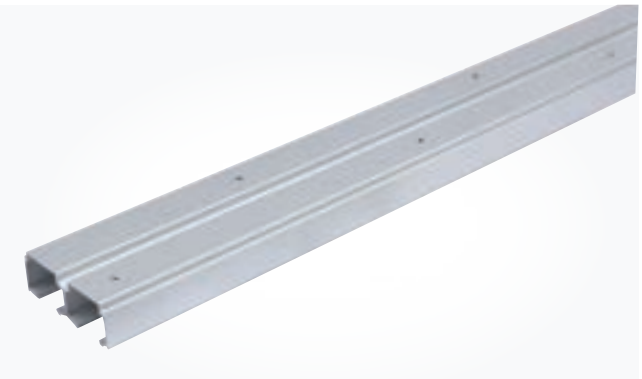

TWO-DOOR SYSTEMS

PART #	TRACK LENGTH
SLAL-250-BP-2DR-48	48"
SLAL-250-BP-2DR-60	60"
SLAL-250-BP-2DR-72	72"
SLAL-250-BP-2DR-96	96"
SLAL-250-BP-2DR-144	144"

FOUR-DOOR SYSTEMS

PART #	TRACK LENGTH
SLAL-250-BP-4DR-48	48"
SLAL-250-BP-4DR-60	60"
SLAL-250-BP-4DR-72	72"
SLAL-250-BP-4DR-96	96"
SLAL-250-BP-4DR-144	144"

SLAL-250-SW

Aluminum Side Wall Mount Track System

PART #	TRACK LENGTH
SLAL-250-SW-48	48"
SLAL-250-SW-60	60"
SLAL-250-SW-72	72"
SLAL-250-SW-96	96"
SLAL-250-SW-144	144”

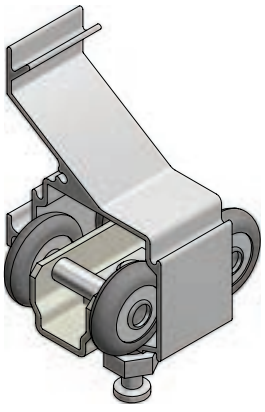

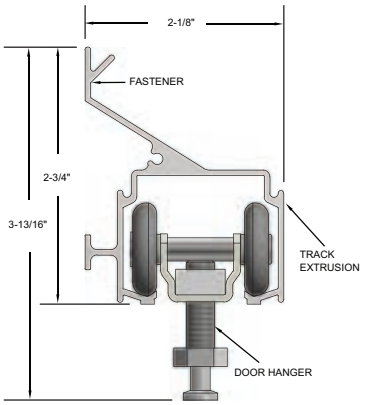

CROSS REFERENCE

NGP	SLAL-250-BP	SLAL-250-SW
HAGER	9611	9710
PEMKO	HBP200A	280C-SWKIT
STANLEY	BPC150N-00	--
LE JOHNSON	100SM	2610
KN CROWDER	C-500	C-412

SLIDING DOOR HARDWARE

POCKET DOOR/FRAME KIT

SLAL-250-PD

Aluminum Top Mount Track System BHMA CERTIFIED

PART #	TRACK LENGTH
SLAL-250-PD-48	48"
SLAL-250-PD-60	60"
SLAL-250-PD-72	72"
SLAL-250-PD-96	96"
SLAL-250-PD-144	144"



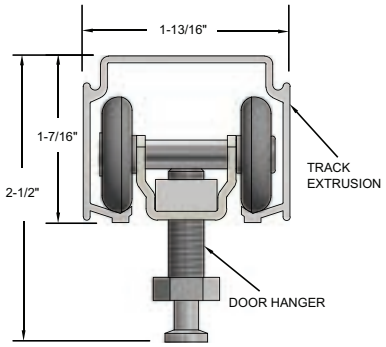

SLAL-250-PDKIT

Aluminum Top Mount Track System

PART #	APPLICATION	FOR UP TO:
SLAL-250-PDKIT	4" Wood or Metal Stud	3/0 x 7/0
SLAL-250-PDKIT-48"DR	4" Wood or Metal Stud	4/0 x 7/0
SLAL-250-PDKIT-6	6" Wood Stud (5 ½" Header)	3/0 x 7/0
SLAL-250-PDKIT-6-48"	6" Wood Stud (5 ½" Header)	4/0 x 7/0
SLAL-250-PDKIT-6M	6" Metal Stud (6" Header)	3/0 x 7/0
SLAL-250-PDKT-6M-48"	6" Metal Stud (6" Header)	4/0 x 7/0

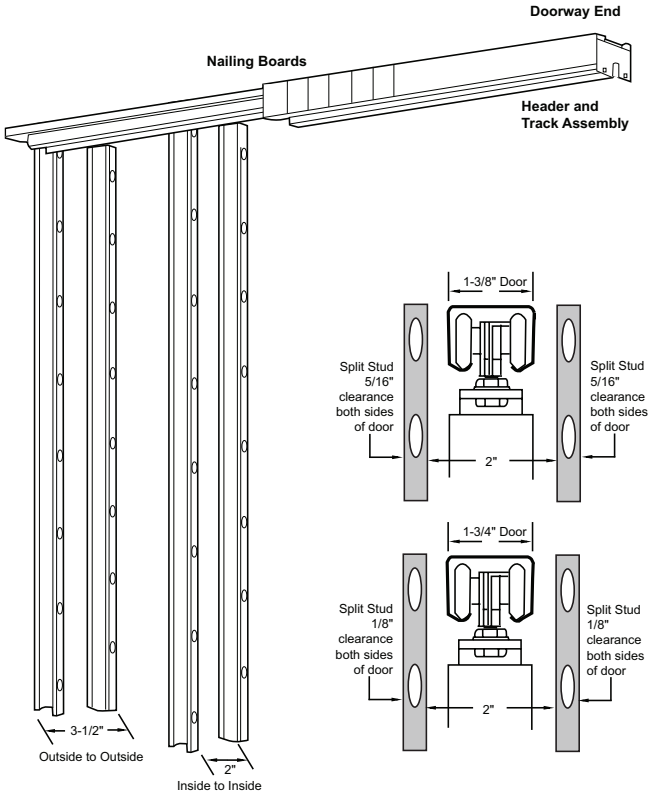

CROSS REFERENCE

NGP	SLAL-250-PD	SLAL-250-PDKIT
HAGER	9878	9630
PEMKO	H200A	PF28200A6080
STANLEY	PDC150N-00	PDC150N-00
LE JOHNSON	100PD	1500PF
KN CROWDER	C-411	TYPE B

SLIDING DOOR HARDWARE

STAINLESS STEEL

SLSS1

Sliding Door Hardware, Stainless Steel Top Mount Round Track System

STAINLESS STEEL TOP MOUNT ROUND TRACK SYSTEM

PART #	TRACK LENGTH
SLSS1-6	78 ¾"
SLSS1-8	98 7/16"

STAINLESS STEEL TOP MOUNT ROUND TRACK SYSTEM (WITH SOFT CLOSE)

PART #	TRACK LENGTH
SLSS1-6-SC*	78 ¾"
SLSS1-8-SC*	98 7/16"

SLSS2

Sliding Door Hardware, Stainless Steel Side Mount Round Track System

STAINLESS STEEL SIDE MOUNT ROUND TRACK SYSTEM

PART #	TRACK LENGTH
SLSS2-6	78 ¾"
SLSS2-8	98 7/16"

STAINLESS STEEL SIDE MOUNT ROUND TRACK SYSTEM (WITH SOFT CLOSE)

PART #	TRACK LENGTH
SLSS2-6-SC*	78 ¾"
SLSS2-8-SC*	98 7/16"

** Soft Close / Open Hardware is Included for Both Directions in Addition to the SLSS1-6 and SLSS1-8 Complete Kit Contents*

CROSS REFERENCE

NGP	SLSS1	SLSS2	SLSS1-6-SC	SLSS1-8-SC	SLSS2-6-SC	SLSS2-8-SC
PEMKO	W60	W100	SFT-W60	SFT-W60	SFT-W100	SFT-W100
HAGER	9432	9436	–	–	–	–
KN CROWDER	CRT-51	CRT-52	–	–	–	–

GAPGUARD

FIRE DOOR ACCESSORIES

UL CERTIFIED FOR USE IN
THE US AND CANADA

PRODUCT OVERVIEW

GapGuard Fire Door Accessories are UL Certified
for use on Hollow Metal and Wood Fire-Rated Doors

GAP90

Fire Door Head/Jamb Gap Solution

- ⅛" - 9⁄16" Gaps on 20-180 Minute Doors
- Non-Handed
- In-Field Modifiable
- Available in Dark Brown and Gray

180 MINUTES

Required When Gap90-ME is Applied on Wood Doors Only

GAP90-ME

Meeting Edge and Perimeter Gap Solution

- Application Certified for Perimeter of Fire Doors and/or on Frames with Excessive Clearance up to ⅜"
- Non-Handed
- In-Field Modifiable
- Gray Finish

90 MINUTES

9590

Fire Door Bottom Gap Solution

- Door Bottom Gaps, Measuring up to 1½"
- Non-Handed
- In-Field Modifiable
- Brushed Stainless Steel Finish

180 MINUTES

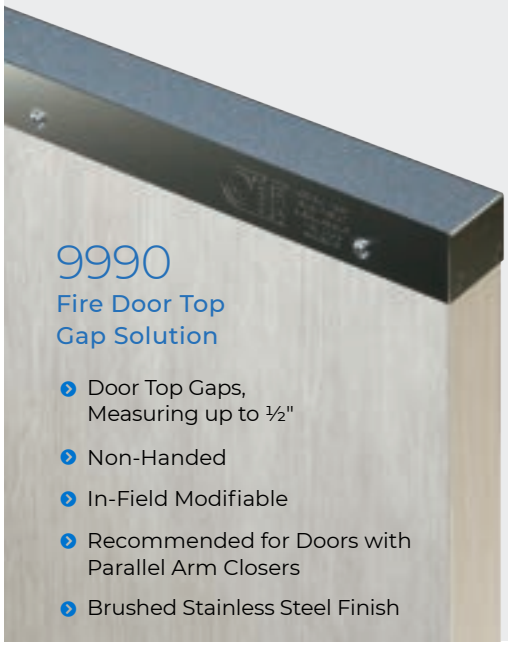

9990

Fire Door Top Gap Solution

- Door Top Gaps, Measuring up to ½"
- Non-Handed
- In-Field Modifiable
- Recommended for Doors with Parallel Arm Closers
- Brushed Stainless Steel Finish

180 MINUTES

GAPGUARD

FIRE DOOR ACCESSORIES

UL CERTIFIED FOR USE IN
THE US AND CANADA

9595DKB

90 MINUTES

Floating Fire Door Bottom Gap Solution

- Door Bottom Gaps, up to 1⅜"
- Non-Handed
- Designed to Travel Over Uneven Floors, With a Range of ⅜"
- Optional L-Bracket Allows for Easy Installation
- Powder-Coated Matte-Black

9200

45 MINUTES 60 MINUTES

Gap Solution for Excessive Fire Door and Frame Clearances

- For Excessive Gaps up to ⅜", up to 45 Minutes
- For excessive gaps up to 5⁄16" at 60 min.
- Dimensions are 1" x 1⁄16"
- Formulated to Expand at 275° up to 20 Times Original Thickness
- Sold by the Foot: 3' Minimum to 410' Reel

9245

45 MINUTES

Intumescent Door Shoe

- For Excessive Gaps up to 1½", 45 Min.
- Door Shoe Available with Vinyl Seal (V) or Nylon Brush (WH)
- **Anodized:** 9245VA / 9245WHA
  Black Anodized: 9245VB / 9245WHB
  Dark Bronze: 9245VDKB / 9245WHDKB

FR180-6, FR180-48

180 MINUTES

Frame Repair Kit

- UL-Certified for Steel Fire Doors and Frames Rated up to 180 Min.
- FR180-6: 6" Kits, 5 per Box
  FR180-48: 48" Kits, (Can be Cut Down in Field) 5 per Box

9545

45 MINUTES

Excessive Clearance Door Bottom

- For Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- For Excessive Gaps up to 1½", 45 Min.
- **Anodized:** 9545VA / 9545WHA
  Black Anodized: 9545VB / 9545WHB
  Dark Bronze: 9545VDKB / 9545WHDKB

FP180-225

180 MINUTES

Frame Patch Kit

- UL-Certified for Steel Fire Doors and Frames Rated up to 180 Minutes
- Maximum Area of Cutout Concealed by Frame Patch is 2½" Sq. In.

9220

20 MINUTES

Excessive Clearance Door Bottom

- For Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- For Excessive Gaps up to 1½", 20 Min.
- **Anodized:** 9220VA / 9220WHA
  Black Anodized: 9220VB / 9220WHB
  Dark Bronze: 9220VDKB / 9220WHDKB

GAPGUARD FIRE CAULK

90 MINUTES

- For Holes up to 1¾" Diameter on Doors and Frames up to 90 minutes
- GAPGUARD FIRE CAULK 10.0 oz Cartridges, 10 per Box
- GAP FIRE CAULK 3.0 oz. Tubes, 6 per Box

IT IS ALL OF THE THINGS!

GapGuard Fire Door Accessories provide you a one-stop, get your facility BACK INTO compliance solution. Whether you have Excessive Gaps at the Head, Jamb, Meeting Edge and/or Bottom, or want to modify the hardware on an existing door while retaining compliance, we've got a solution to fit your needs.

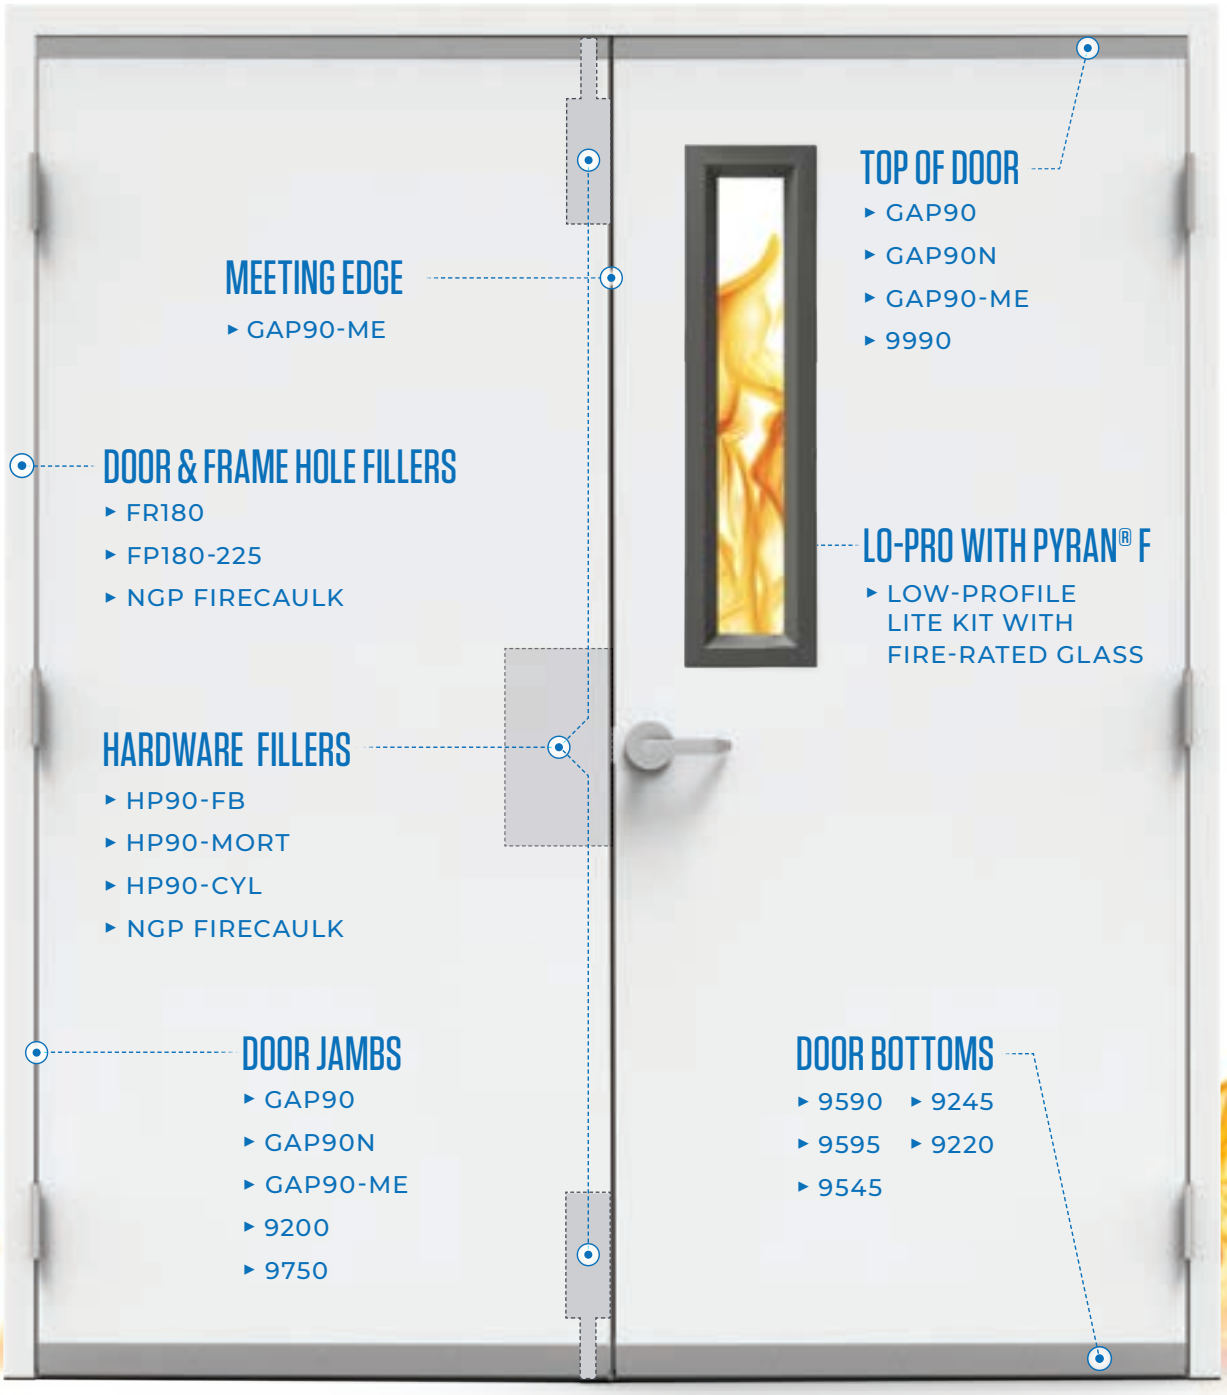

For Our Most Up-to-Date
Condensed Catalog Scan this
QR Code or Visit ngp.com.

For Our Most Up-To-Date
Complete Product Catalog Scan
this QR Code or Visit ngp.com.

NGP

ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

NGP-CAT-CON-1026-A