



Safety Seal for Double-Acting Doors

1000R




Material

Aluminum alloy 6063, T5 temper
 Synthetic rubber polymer blend: Chloroprene and EPDM
 Neoprene is black

- Very good abrasion resistance, tensile strength and memory
- Flame resistant
- Moisture resistant
- Temperature range -20°F to 200°F
- Good resistance to ozone, sunlight and aging
- #6 x 3/4" stainless steel sheet metal screws furnished
- Screw holes slotted for adjustment
- Seals and closes gap at heel of double-acting or center pivoted doors
- 5", 10" or 16" overall widths available - Specify

Finishes

1000RA Anodized Aluminum
 1000RB Gold
 1000RDKB Dark Bronze

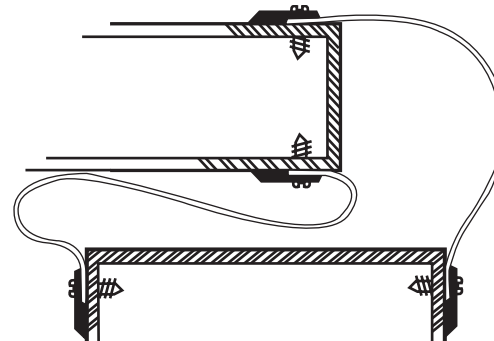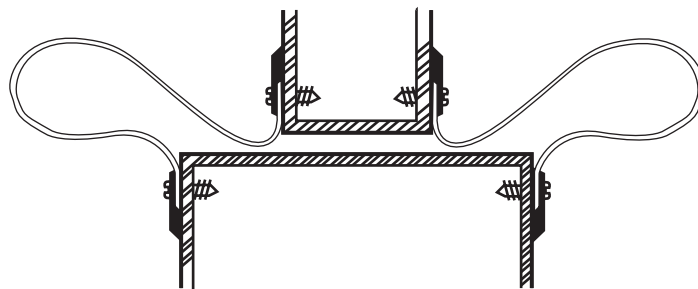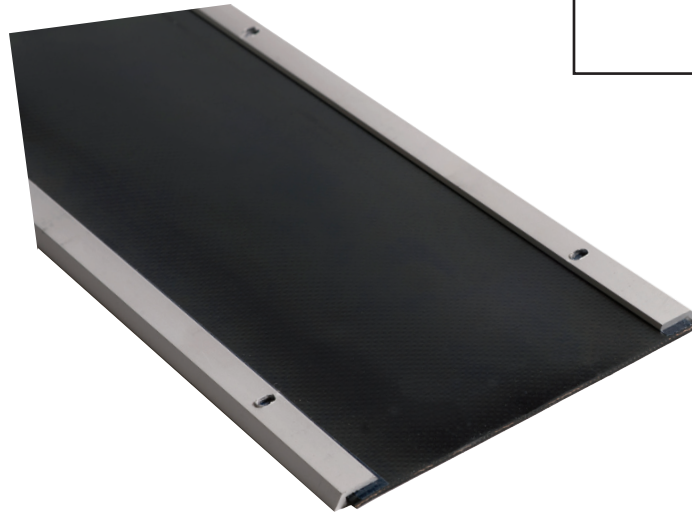

Project:
Submitted by:
Date:
Notes: