



# 114S

## SILICONE OVERLAPPING ASTRAGAL

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge  
Silicone Sponge is Gray

- ▶ Excellent flexibility and memory
- ▶ Flame resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Stainless Steel SMS Furnished
- ▶ Screw Holes Slotted for Adjustment

#### Finishes

114SA Anodized Aluminum  
114SB Gold  
114SDKB Dark Bronze

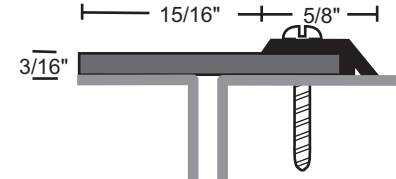

NGP-GKT-114S-PCS-0720-A