



NATIONAL GUARD
PRODUCTS

Neoprene Closed Cell Sponge Seal

133N





Material

Aluminum alloy 6063, T5 temper
Synthetic rubber polymer blend: PVC, Nitrile rubber (NBR), and Chloroprene closed cell advanced elastomeric foam
Neoprene is black

- Very good abrasion resistance, tensile strength and memory
- Flame resistant
- Moisture resistant
- Temperature range -20°F to 200°F
- Good resistance to ozone, sunlight and aging
- BHMA certified to ANSI/BHMA A156.22 performance tests for heat, cold, air infiltration and smoke infiltration
- #6 x 3/4" stainless steel sheet metal screws furnished
- Screw holes slotted for adjustment

Finishes

133NA Anodized Aluminum
133NB Gold
133NDKB Dark Bronze

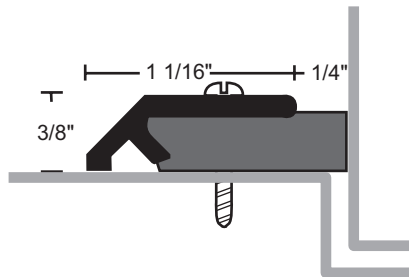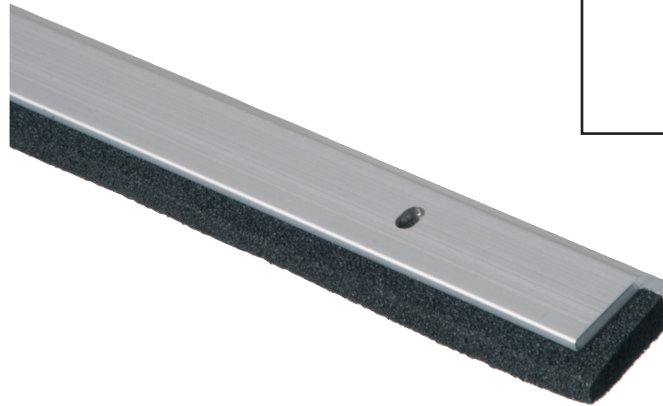

Project:

Submitted by:

Date:

Notes: