



# 141N

## SPRING ADJUSTABLE NEOPRENE PERIMETER SEAL

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic Rubber Polymer Blend: Chloroprene and EPDM  
Neoprene is Black


- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -20°F to 200°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Adjustment Screws on 10" Centers Allow Adjustment Without Re-Positioning Mounting Location
- ▶ Spring-Loaded to Maintain Pressure for the Most Effective Seal
- ▶ #6 x 3/4" or #6 x 1 1/2" Stainless Steel SMS Furnished

#### Finishes

141NA Anodized Aluminum  
141NDKB Dark Bronze

#### Options

FATT - Fast Attach Tape

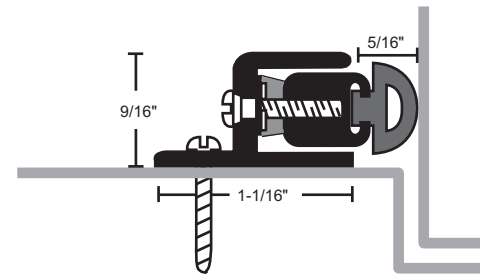

NGP-GKT-141N-PCS-0720-A