




# T43

Mortised  
Astragal

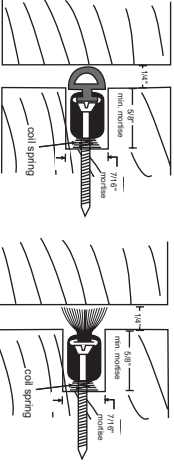

See [ngp.com](http://ngp.com) for All Applicable  
Certifications for this Product.



- Aluminum Alloy 6063, T5 Temper
- #6 Stainless Steel Sheet Metal Screws Furnished
- Flame/Moisture Resistant

# SEAL

[ngp.com](http://ngp.com)  
1-800-NCP-RUSH

# INSTALLATION INSTRUCTIONS

## 143

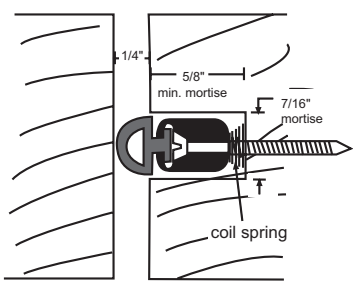

1. Cut astragal to length.
2. Prepare the door by mortising  $\frac{7}{16}$ " wide x  $\frac{5}{8}$ " deep.
3. Insert screws into holes in astragal and then slide springs over tips of screws.
4. Install astragal into mortised portion of door.
5. Turn every screw approximately halfway in.
6. Then tighten each screw the necessary depth required to close the gap between the doors.
7. Slide gasket material into metal retainer.
8. Adjust so seal does not impede proper closing and latching of the doors.



[ngp.com](http://ngp.com)

1-800-NGP-RUSH

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706