




16

Aluminum Rain Drip Guard

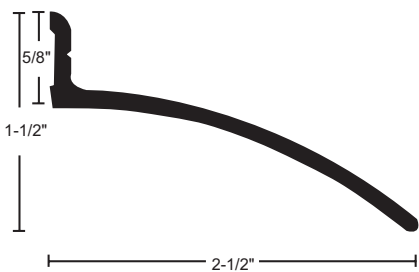

- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 2½" Wide x 1½" Tall
- ▶ #6 x ¾" Stainless Steel SMS Furnished
- ▶ Screw Holes Slotted For Adjustment

ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com


**S
E
A
F**

INSTALLATION INSTRUCTIONS

Typical installation is to exterior face of frame header.

Length of Rain Drip Guard should extend beyond width of door. Install full width of frame header if possible.

1. Mark hole locations.
2. Drill pilot holes for screws using a $\frac{7}{64}$ " bit.
3. Fasten screws, working from one end to the other.
4. Caulk top edge of drip strip and around each screw to prevent water penetration.

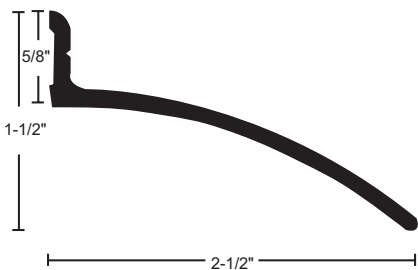

THE PRODUCTS
YOU COUNT ON
THE PEOPLE
YOU TRUST
ngp.com

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

quotes@ngp.com
orders@ngp.com