


# NCP

# T60

Aluminum  
Perimeter  
Bulb Seal



# SEAL



**BHMA**  
CERTIFIED



See [ngp.com](http://ngp.com) for All Applicable  
Certifications for this Product.

POSITIVE PRESSURE TESTED GASKETING MATERIALS  
FOR FIRE DOORS FOR APPLICATION TO HOLLOW-  
METAL-TYPE FIRE DOORS RATED UP TO 3 HOURS AND  
WOOD-TYPE FIRE DOORS RATED UP TO 1½ HOURS.  
CATEGORY J. CATEGORY H (APPLIES TO 160S ONLY)

160S SILICONE IS SMOKE AND DRAFT  
CONTROL GASKETING (CATEGORY  
H) TESTED TO UL 1784; MEETS  
REQUIREMENTS OF NFPA 105, IBC FOR  
USE ON "S" LABEL DOORS.

- Aluminum Alloy 6063,  
T5 Temper
- Flame/Moisture Resistant
- #6 X ¾" Stainless Steel  
Sheet Metal Screws  
Furnished


**ngp.com**  
**1-800-NCP-RUSH**

---

# INSTALLATION INSTRUCTIONS

---

## 160

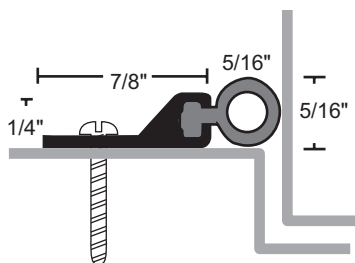

1. Cut seal to fit.
2. With door closed, position seal, Mark screw holes.
3. Drill pilot holes for screws using a  $\frac{7}{64}$ " drill bit.
4. Install with screws provided in all mounting holes, working from one end to the other.
5. Adjust position so that gasket is slightly compressed against door but does not impede proper closing and latching.



[ngp.com](http://ngp.com)

1-800-NGP-RUSH

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

### **NGP MEMPHIS**

4985 East Raines Road  
Memphis, TN 38118

### **CARSON CITY**

3689 Arrowhead Drive  
Carson City, NV 89706