



NATIONAL GUARD
PRODUCTS

Polyurethane Sweep 198U




Material

Aluminum alloy 6063, T5 temper
Polyurethane is black

- Very good abrasion resistance, tensile strength, memory and UV resistance.
- Flame resistant
- Moisture resistant
- Temperature range -65°F to 175°F
- BHMA Certified to ANSI/BHMA A156.22 performance tests for heat, cold, air infiltration and smoke infiltration
- #6 x 3/4" stainless steel sheet metal screws furnished
- Screw holes slotted for adjustment

Finishes

198UA Anodized Aluminum
198UB Gold
198DKB Dark Bronze

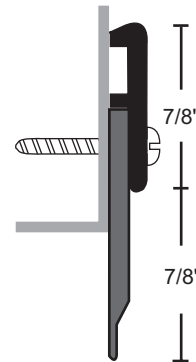

Project:

Submitted by:

Date:

Notes: