


# NGFP 2000

## Aluminum Door Sweep



**BHMA**  
CERTIFIED



See [ngpp.com](http://ngpp.com) for All Applicable  
Certifications for this Product.

POSITIVE PRESSURE TESTED GASKETING MATERIALS  
FOR FIRE DOORS FOR APPLICATION TO HOLLOW-  
METAL-TYPE FIRE DOORS RATED UP TO 3 HOURS AND  
WOOD-TYPE FIRE DOORS RATED UP TO 1½ HOURS.  
CATEGORY H.

SILICONE AND NEOPRENE ARE SMOKE AND  
DRAFT CONTROL GASKETING (CATEGORY H)  
TESTED TO UL 1784; MEETS REQUIREMENTS  
OF NFPA 105, IBC FOR USE ON "S" LABEL  
DOORS.

- Aluminum Alloy 6063, T5 Temper
- Flame/Moisture Resistant
- #6 x ¾" Stainless Steel Sheet Metal Screws Furnished


# SEAL

**ngpp.com**  
**1-800-NGP-RUSH**

---

# INSTALLATION INSTRUCTIONS

---

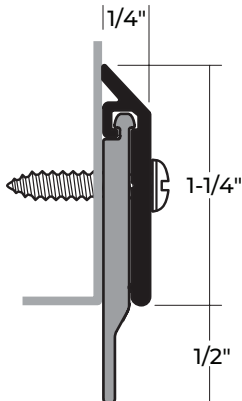

## 200

1. Cut sweep to fit.
2. Close door. Hold sweep at bottom of door. Tap down until contact is made between the sweep and threshold.
3. Mark screw holes.
4. Drill pilot holes for screws using a  $\frac{7}{64}$ " drill bit.
5. Install with screws provided.
6. Adjust position so sweep does not impede proper closing and latching of door.



[ngp.com](http://ngp.com)

1-800-NGP-RUSH

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

### **MEMPHIS**

4985 East Raines Road  
Memphis, TN 38118

### **CARSON CITY**

3689 Arrowhead Drive  
Carson City, NV 89706