



200S

Silicone Sweep

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
Silicone is Gray

- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ #6 x 3/4" Stainless Steel SMS Furnished
- ▶ Screw Holes Slotted for Adjustment

Finishes

200SA Anodized Aluminum
200SB Gold
200SDKB Dark Bronze

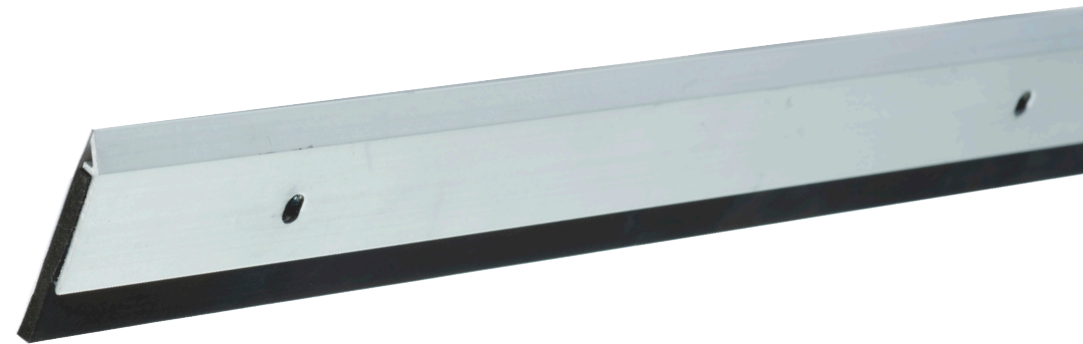

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

NGP-GKT-200S-PCS-0323-A

ngp.com
1-800-NGP-RUSH