


Bumper Seal Thresholds


All thresholds this page




890 .82 lbs./ft.
890B .82 lbs./ft.
890DKB .82 lbs./ft.

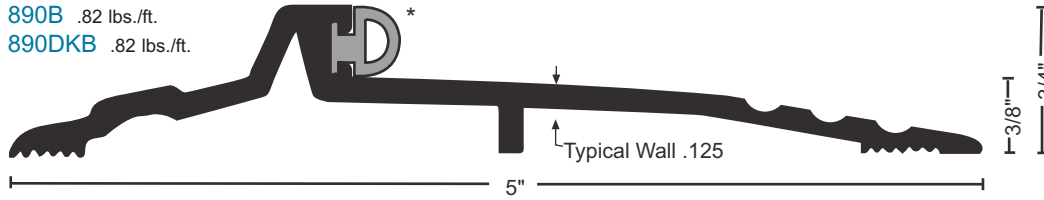


804 .80 lbs./ft.
804DKB .80 lbs./ft.

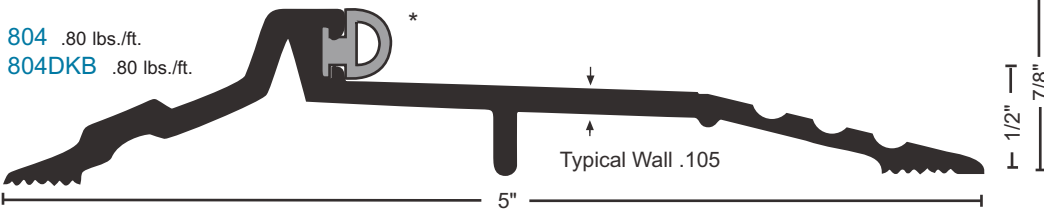


884 1.00 lbs./ft.
884DKB 1.00 lbs./ft.

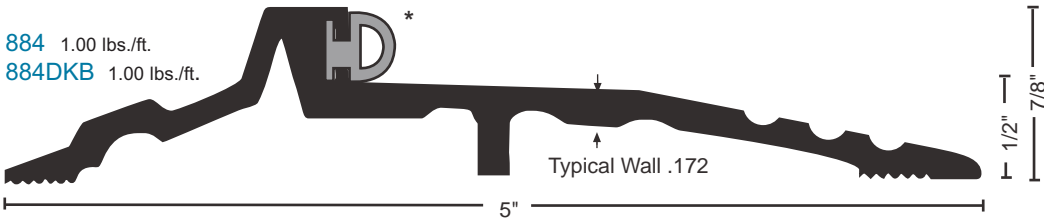


803 .80 lbs./ft.
803DKB .80 lbs./ft.

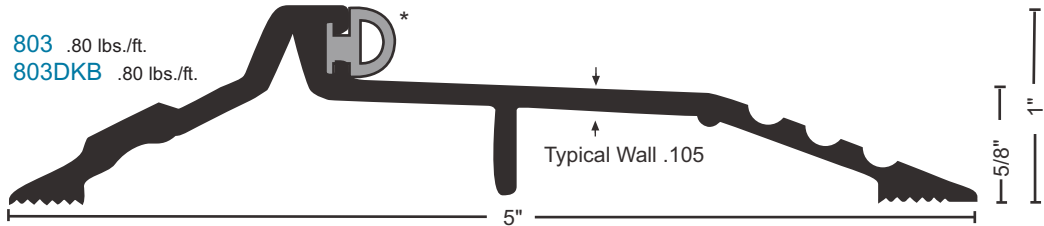

883 1.10 lbs./ft.
883DKB 1.10 lbs./ft.

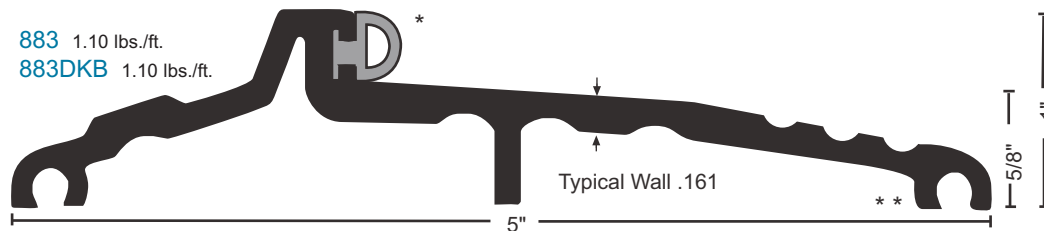


*** D Bumper Seal**



Seals against the door providing weather resistance

Vinyl ("V") supplied unless other material is specified

Options:
Neoprene ("N")
Silicone ("S")
Pile ("P")



FASTENERS
#10 x 1-1/2" FH zinc plated wood screws are included on mill finish thresholds. Zinc plated antique bronze finish screws are provided to match DKB finish.

*** VINYL FOOT SEAL**
used instead of caulking to increase the weather resistance of the threshold. Specify on order

Bumper Seal Thresholds