

Door Edges with Astragals

NGP Order Form (Page EA5) indicating model number, hand, net length, hardware preps, and precise hardware locations must accompany all orders.


- 20 ga. cold rolled steel on edges
- 18 ga. cold rolled steel on astragal welded to edges
- For 1 3/4" thick doors (inside dim. 1 3/4" actual)
- #8 x 3/4" flat undercut Phillips head SMS
- Standard finish = Tan (T) powder coat



Available Options

- Powder coat color options - see page EA1
- Stainless Steel 20 ga., Type #304, #4 brushed finish - suffix SS"
- Galvanneal
- Torx Security Screws
- Special door thickness: 1 3/8", 2", 2 1/4"
- Lead lining .030" thick


ASTRAGAL ON ACTIVE LEAF

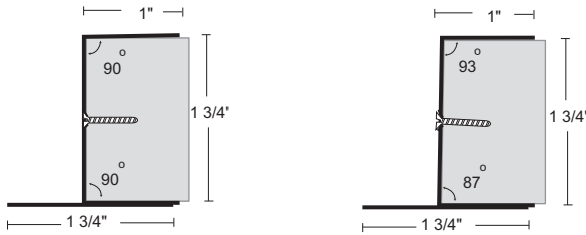

550 SINGLE ASTRAGAL SQUARE EDGE


552 SINGLE ASTRAGAL BEVELED EDGE

ASTRAGAL ON INACTIVE LEAF

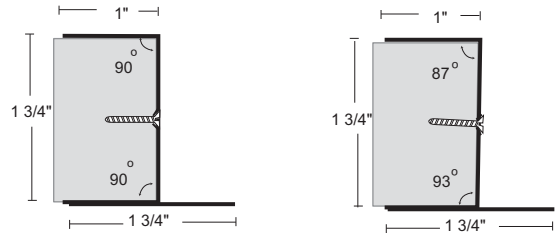


560 SINGLE ASTRAGAL SQUARE EDGE


562 SINGLE ASTRAGAL BEVELED EDGE

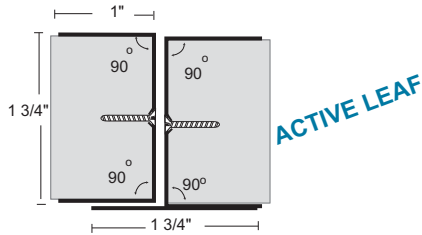


551 ASTRAGAL SET SQUARE EDGE

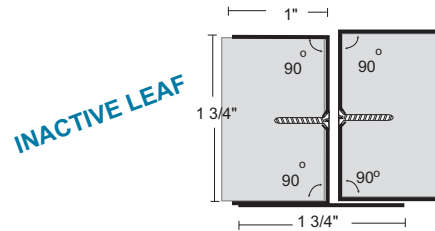

561 ASTRAGAL SET SQUARE EDGE

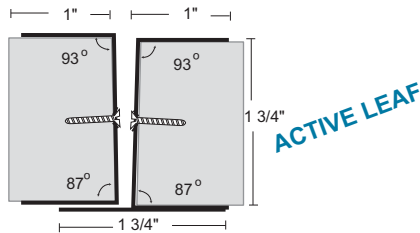

553 ASTRAGAL SET BEVELED EDGE

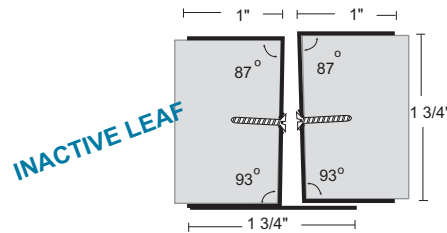

563 ASTRAGAL SET BEVELED EDGE

Astragals mounted on active leaf that are prepped for a lockset will be notched for the strike lip, unless specified otherwise