

NGP-Edge® Sealing System/Smoke and Draft Control Gasketing Category 'G' and 'H' Classified




9850B Brown
9850C Charcoal



9750B Brown
9750C Charcoal

Intumescent with TPE Fire and Smoke Seal

 **20, 45, 60, 90 minute rated category B**
wood doors perimeter application up to:
single swing 4'0 x 9'0
pairs 8'0 x 9'0




1/8" clearance required between door and frame

Available in 36", 48", 84", 96" and 108" lengths


Self-Adhesive

See adhesive specifications on page G9



9500DKB x 2525B Brown
9500 x 2525B Gray x Brown
9500 x 2525W Gray x White

NGP-Edge® Intumescent Fire Seal x Smoke Seal

 **20, 45, 60, 90 minute rated category B**
wood doors perimeter application up to:
single swing 4'0 x 9'0
pairs 8'0 x 9'0




1/8" clearance required between door and frame

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9

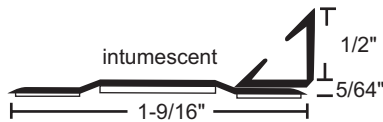

9500DKB x 5020B Brown
9500 x 5020B Gray x Brown

