


NGP-Edge® Sealing Systems - Category 'G' Classified

NGP Intumescent materials are formulated to expand at 375°F to 400°F up to 8-10 times their original thickness; completely sealing the gap around and between doors during a fire.



Intumescent with Protective Skin

Available in 17', 21' and 150' rolls

Self-Adhesive

See adhesive specifications on page G9



Intumescent Fire Seal

Perimeter Application:



20, 45, 60, 90 minute rated category B wood doors up to

single swing 4'0 x 9'0

pairs 8'0 x 9'0


Meeting Edge Application up to 8'0 x 9'0 pairs of category B wood doors:



20 Minute rated with single strip installed



45, 60 Minute rated with two strips installed




9500 Gray
9500DKB Brown

Intumescent with PVC cover

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9

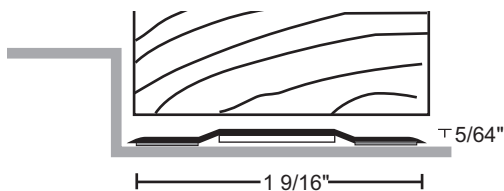

NGP-Edge® Intumescent Fire Seal




20, 45, 60, 90 minute rated category B wood doors up to:

single swing 4'0 x 9'0, perimeter application

pairs 8'0 x 9'0, perimeter/meeting edge

U.S. Pat. DES 417,739



1/8" clearance required between doors and between door and frame