

## L-75 SERIES

### Darkroom Louver for 1 3/4" up to 2 1/4" Thick Doors


- 20 ga. cold rolled steel frame
- Mitered and welded corners
- Welded reinforcing clips at corners
- Blades .040" aluminum
- Counter-sunk mounting screw holes
- #8 x 3/4" Phillips head TEK screws
- Available in uneven and fractional sizes
- Free area 55%
- Textured Black (TBL) powder coat finish

#### Available Options

- Powder coat color options - see page L2
- Thru Bolts (TB) for 1- 3/4" thick doors
- Aluminum Insect screen - 22 ga. 1/8" square mesh installed exterior side unless requested otherwise
- Torx Security Screws
- Zinc electro-plating (not available on insect screen)




Install L-75-A using glass stop or molding

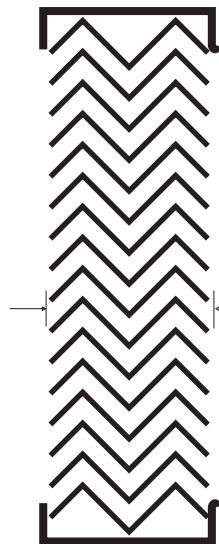

not to scale


#### L-75 A

undersized 1/8" for clearance

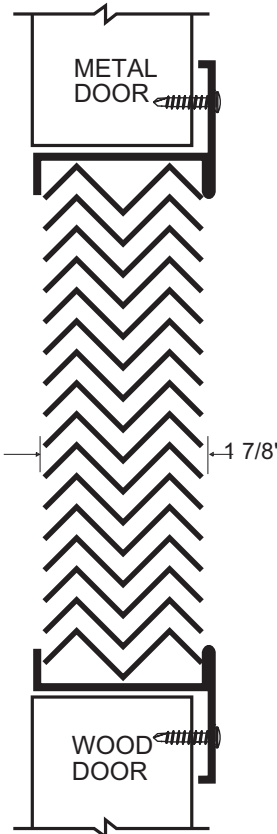

#### L-75 B

undersized 1/8" for clearance

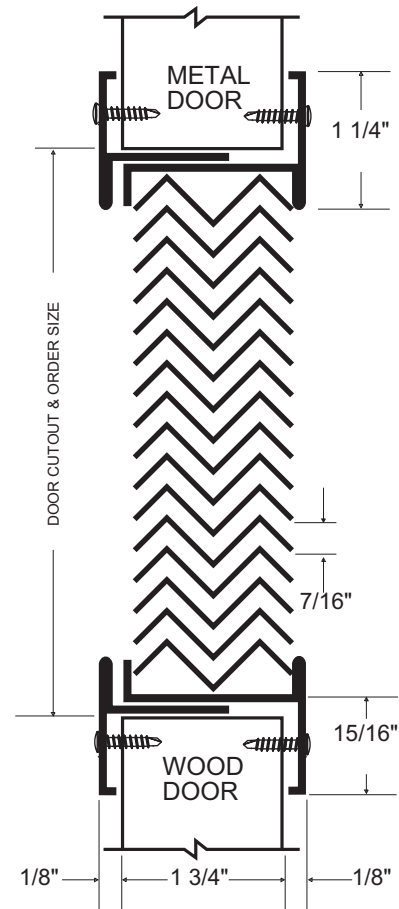

#### L-75 BF

undersized 1/16" for clearance

