



220WH

Nylon Brush Surface Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T6 Temper
 Synthetic Polymer: Polyamide
 Nylon Brush is Black


- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture-Resistant
- ▶ Retains Insecticides Well
- ▶ Temperature Range -70°F to 425°F
- ▶ REACH and RoHS Compliant
- ▶ Not Effective Against Water Penetration
- ▶ Mounts on Push Side of Door
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ ADB's from 12" to 18" Can be Cut Down ½". ADB's 20" and Over Can be Cut Down up to 1½"
- ▶ Minimum Length 11½", Maximum Length 60"
- ▶ ¾" Max Drop
- ▶ Steel End Caps Furnished Standard – Black Finish
- ▶ All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

Finishes

220WHA Anodized Aluminum
 220WHDKB Dark Bronze

Options

Lead Insert Available for Radiation Shield – Specify 'Lead Lined'

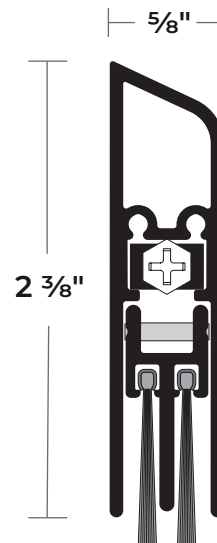

Left-Hand Unit Shown

NGP-CKT-220WH-PCS-0426-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
 Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
 1-800-NGP-RUSH