



# 221NSS

## Stainless Steel Neoprene Automatic Door Bottom

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material

Stainless Steel Type 304  
 Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix Closed Cell  
 Advanced Elastomeric Foam  
 Color is Black


- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ Mounts on Push Side of Door
- ▶ Use With a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and Longer May Be Cut up to 4" in the Field; Under 36" Should Not Be Cut in the Field, Order Net Length
- ▶ Minimum Length 11", Maximum Length 60"
- ▶ End Caps Furnished Standard
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- ▶ 7/8" Max Drop

#### Finishes

Brushed #4 Finish (US32D, 630)

#### Options

1/16" Thick Lead Insert Available – Specify "Lead-Lined"

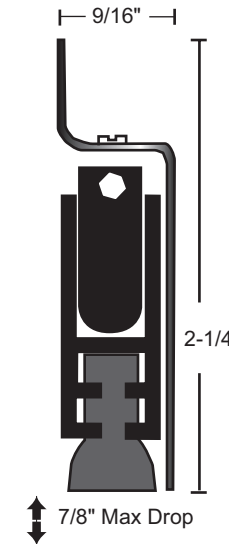

NGP-GKT-221NSS-PCS-1223-A

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
 Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

**ngp.com**  
 1-800-NGP-RUSH