



# 222WH

## Nylon Brush Surface Automatic Door Bottom

### PRODUCT CUT SHEET

#### Material

Aluminum Alloy 6063, T6 Temper  
Synthetic Polymer: Polyamide  
Nylon Brush is Black

- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Abrasion Resistance, Flexibility and Memory
- Moisture-Resistant
- Retains Insecticides Well
- Temperature Range -70°F to 425°F, Remains Flexible at Extreme Temperatures
- REACH and RoHS Compliant
- Not Effective Against Water Penetration
- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- ADB's from 12" to 18" Can be Cut Down 1/2". ADB's 20" and Over Can be Cut Down up to 1 1/2"
- Minimum Length 11 1/2", Maximum Length 60"
- 3/4" Max Drop
- Steel End Caps Furnished Standard – Black Finish
- All Automatic Door Bottoms are Handed. Right Hand Supplied Unless Specified. Field Reversible

#### Finishes



222WHA Anodized Aluminum  
222WHDKB Dark Bronze

#### Options

Lead Insert Available for Radiation Shield – Specify 'Lead Lined'



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

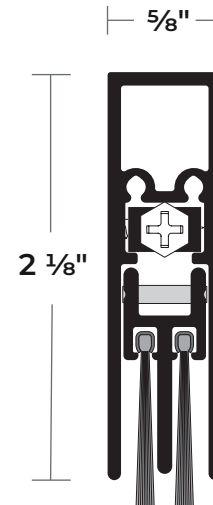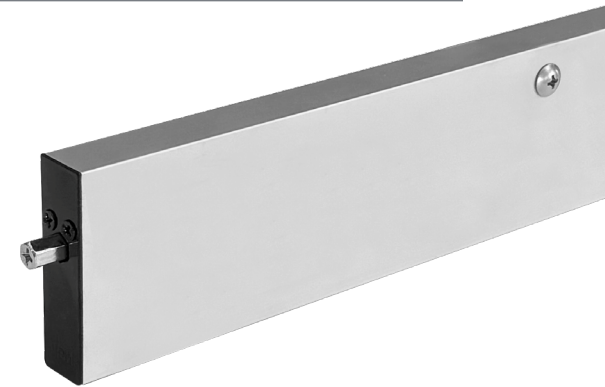

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

NGP-GKT-222WH-PCS-0426-A

**ngp.com**  
1-800-NGP-RUSH