



223S

Silicone E-Z Touch Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
Silicone Is Black

- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -100°F To 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ The EZ-Touch Door Bottom Requires Only 3 to 5 Pounds of Pressure to Activate
- ▶ Perfect for Accessibility Applications and Still Provides an Effective Seal
- ▶ Available 23 1/4" Net to 48" in Length
- ▶ End Caps Furnished Standard
- ▶ 3/4" Max Drop

Finishes

223SA Anodized Aluminum
223SDKB Dark Bronze

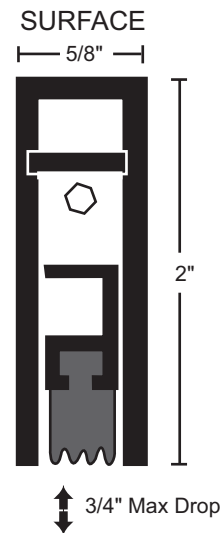

NGP-GKT-223S-PCS-0424-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH