



225S

Silicone Mortise Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
 Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
 Silicone Is Gray

- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Flexibility and Memory
- Flame Resistant
- Moisture Resistant
- Temperature range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- 36" and Longer May Be Cut Up To 4" in the Field, Under 36" Should Not Be Cut in the Field, Order Net Length
- Furnished 1/2" Shorter Than Ordered to Fit Within Net Door Size. (i.e. 36" is Furnished 35 1/2")
- Available 11" Net to 60" in Length
- End Caps Furnished Standard
- Mortise Required 3/4" x 1 15/16"
- 7/8" Max Drop

Finish


Mill Aluminum

Options

Lead Insert Available for Radiation Shield - Specify "Lead-Lined"



STC 52 with STC2 option
 STC 45 with STC2-PR option for pairs of doors

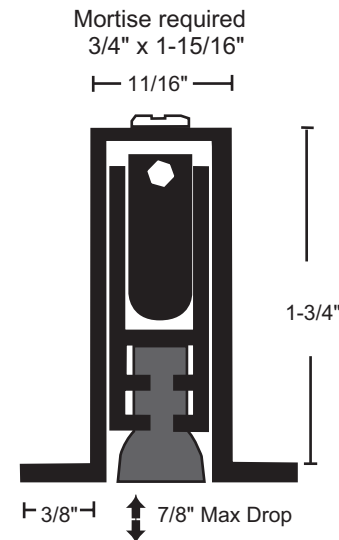

NGP-GKT-225S-PCS-1220-A