



229NBR

Neoprene Brass Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material


Alloy CDA 260 (Copper Alloy C26000)
 Synthetic Rubber Polymer Blend: PVC, Nitrile Rubber (NBR), and Chloroprene Closed Cell Advanced Elastomeric Foam
 Neoprene is Black

- ✔ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ✔ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ✔ Very Good Abrasion Resistance, Tensile Strength and Memory
- ✔ Flame Resistant
- ✔ Moisture Resistant
- ✔ Temperature Range -20°F to 200°F
- ✔ Good Resistance to Ozone, Sunlight and Aging
- ✔ Mounts on Push Side of Door
- ✔ Use with a Threshold for Maximum Sealing Capability
- ✔ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ✔ Specify Exact Net Length Required to Avoid Field Sizing
- ✔ 36" and Longer May Be Cut Up To 4" in the Field, Under 36" Should Not Be Cut in the Field, Order Net Length
- ✔ Minimum Length 11", Maximum Length 60"
- ✔ End Caps Furnished Standard
- ✔ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- ✔ 7/8" Max Drop

Finishes
 Brass

Options

Polished (721), suffix "POL"
 Dark Oxidized Oil Rubbed (722) Similar to US10B, Suffix DKB
 Lead Insert Available for Radiation Shield - Specify "Lead-Lined"

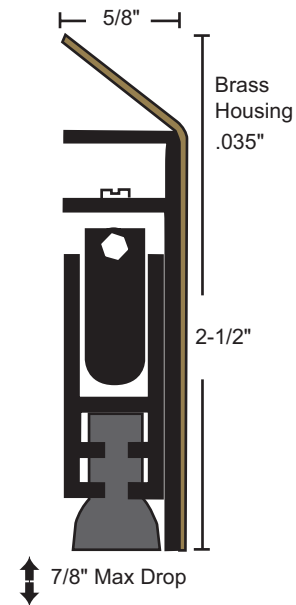

NGP-GKT-229NBR-PCS-0820-A