



229NSS

Stainless Steel Neoprene Automatic Door Bottom

PRODUCT CUT SHEET

Material

Stainless Steel Type 304
Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix Closed Cell
Advanced Elastomeric Foam
Color is Black

- ▶ BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ Mounts on Push Side of Door
- ▶ Use With a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications where no Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and longer may be Cut up to 4" in the Field, under 36" should not be Cut in the Field, Order Net Length
- ▶ Minimum Length 11", Maximum Length 60"
- ▶ End Caps Furnished Standard
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units under 36" Not Field Reversible. Please Specify Handing
- ▶ 7/8" Max Drop

Finishes


Brushed #4 Finish (US32D, 630)

Options

1/16" Thick Lead Insert Available – Specify "Lead-Lined".



| |
|---------------|
| PROJECT: |
| SUBMITTED BY: |
| DATE: |
| NOTES: |

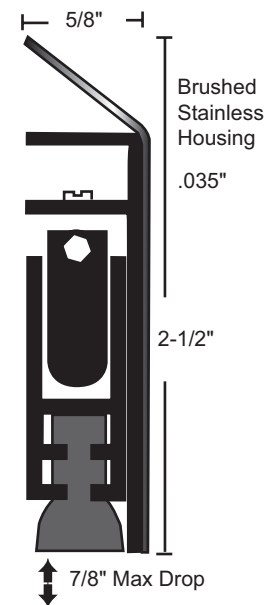

NGP-GKT-229NSS-PCS-1223-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH