



229SBR

Silicone Brass Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Alloy CDA 260 (Copper Alloy C26000)
 Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
 Silicone Is Gray


- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Flexibility and Memory
- Flame Resistant
- Moisture Resistant
- Temperature range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- 36" and Longer May Be Cut Up To 4" in the Field, Under 36" Should Not Be Cut in the Field, Order Net Length
- Minimum Length 11", Maximum Length 60"
- End Caps Furnished Standard
- Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- 7/8" Max Drop

Finishes

Brass

Options

Polished (721), suffix "POL"
 Dark Oxidized Oil Rubbed (722) Similar to US10B, Suffix DKB
 Lead Insert Available for Radiation Shield - Specify "Lead-Lined"

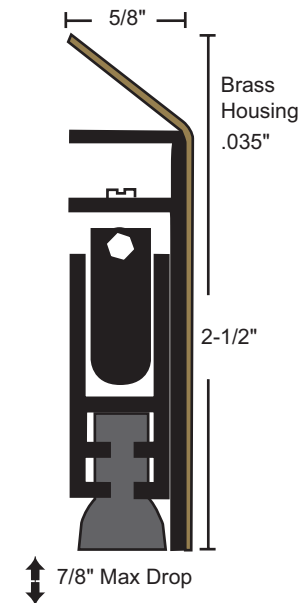

NGP-GKT-229SBR-PCS-0820-A