



310S

Silicone Surface Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
 Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
 Silicone Is Black


- BHMA Certified to ANSI/BHMA A156.22, 1,000,000 Cycle Test-Grade 1
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat and Cold
- Excellent Flexibility and Memory
- Flame-Resistant
- Moisture-Resistant
- Temperature range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- Excellent Resistance to Ozone, UV and Aging
- Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- Mounts on Push Side of Door
- Use with a Threshold for Maximum Sealing Capability
- Nylon Brush Recommended for Carpet Applications Where no Threshold is Provided
- Specify Exact Net Length Required to Avoid Field Sizing
- 36" and Longer May Be Cut up to 4" in the Field; Under 36" Should Not Be Cut in the Field, Order Net Length
- Minimum Length 11", Maximum Length 60"
- End Caps Furnished Standard
- Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- 7/8" Max Drop

Finishes

310SA Anodized Aluminum
 310SDKB Dark Bronze

Options

1/16" Thick Lead Insert Available –
 Specify "Lead-Lined"

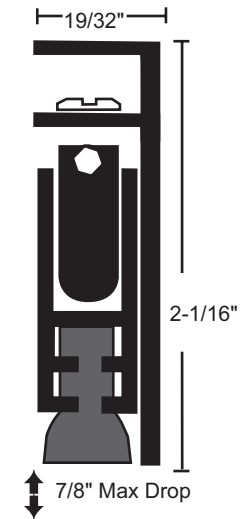

NGP-GKT-310S-PCS-0424-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
 Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
 1-800-NGP-RUSH