




Safety Tread Stair Renovation Nosing 3509

Materials & Finishes

Aluminum alloy 6063, T5 temper
Mill finish aluminum with black carborundum and aluminum oxide non-slip abrasive tread

- 9" wide x 1-3/8" tall
- Weight: 3.75 lbs./ft.
- Non-slip abrasive tread material bonded and locked into the aluminum tread base
- Treads exceed ADA requirements for coefficient of friction tested to ASTM F609 and MIL-D-23003A. The coefficient of friction for NGP stair nosings is .94 dry and .86 wet
- Furnished drilled and countersunk for screws, except 3231 and 3241 which have hook anchor designed for installation into wet concrete
- Furnished standard with #14 x 1-1/2" stainless steel wood screws. Specify if other screws and anchors required
- Stair nosings are manufactured to order and are non-cancelable and non-returnable

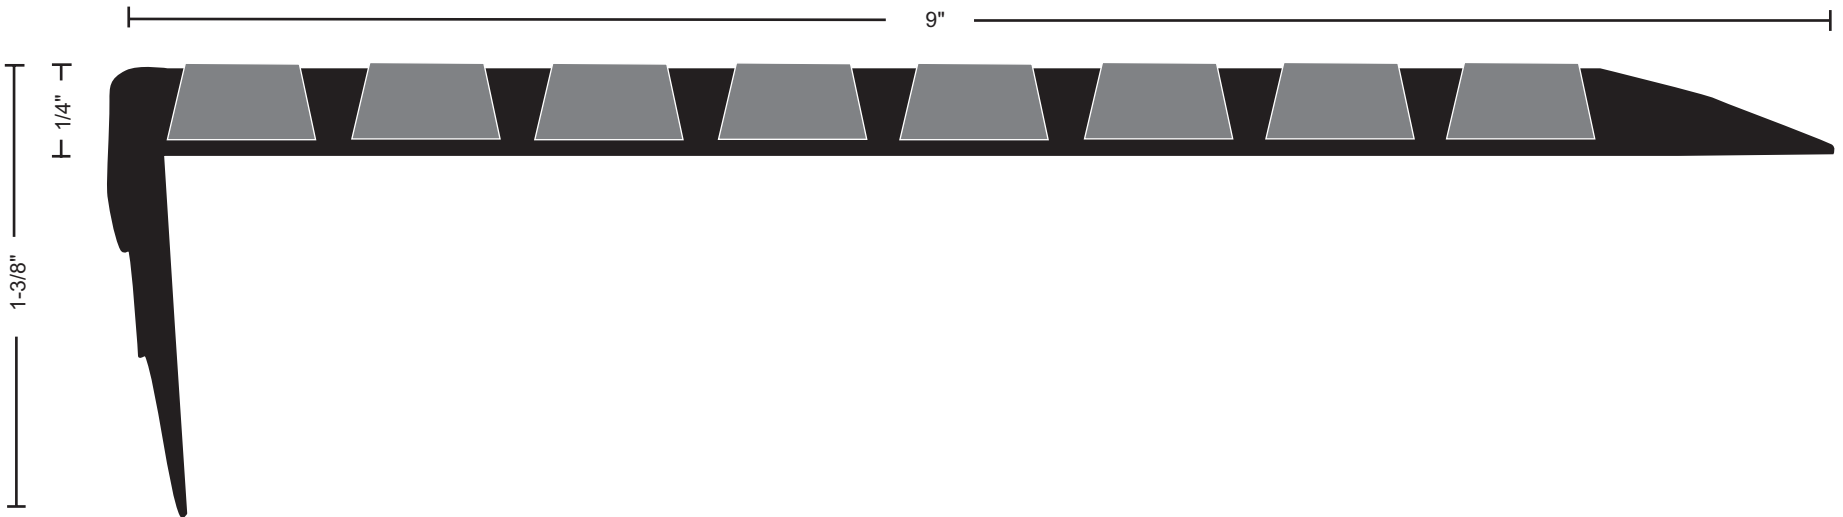

Project:

Submitted by:

Date:

Notes: