



# 3511

## Safety Tread Stair Renovation Nosing

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


#### Material

Aluminum Alloy 6063, T5 Temper

- ▶ 11" Wide x 1-3/8" Tall
- ▶ Weight: 4.7 Lbs./Ft.
- ▶ Non-Slip Abrasive Tread Material Bonded and Locked Into the Aluminum Tread Base
- ▶ Treads Exceed ADA Requirements for Coefficient of Friction Tested to ASTM F609 and MIL-D-23003A. The Coefficient of Friction for NGP Stair Nosings is .94 Dry and .86 Wet
- ▶ Furnished Drilled and Countersunk for Screws, Except 3231 and 3241 Which Have Hook Anchor Designed for Installation Into Wet Concrete
- ▶ Furnished Standard With #14 x 1-1/2" Stainless Steel Wood Screws. Specify if Other Screws and Anchors Required
- ▶ Stair Nosings are Manufactured to Order and are Non-Cancelable and Non-Returnable

#### Finish

Mill Finish Aluminum With Black Carborundum and Aluminum Oxide Non-Slip Abrasive Tread

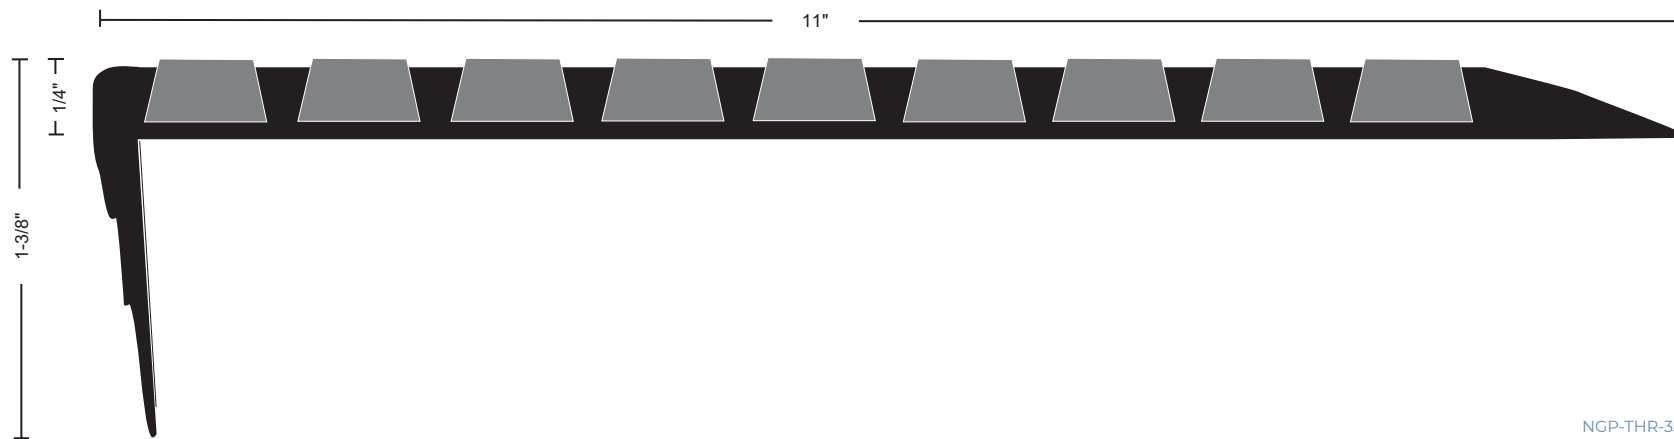

NGP-THR-3511-PCS-0223-A

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
4584 Calimesa Street  
Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

**ngp.com**  
1-800-NGP-RUSH