


3ASL, 3DKB, 3SP 7ASL, 7DKB, 7SP Steel Mounting Brackets

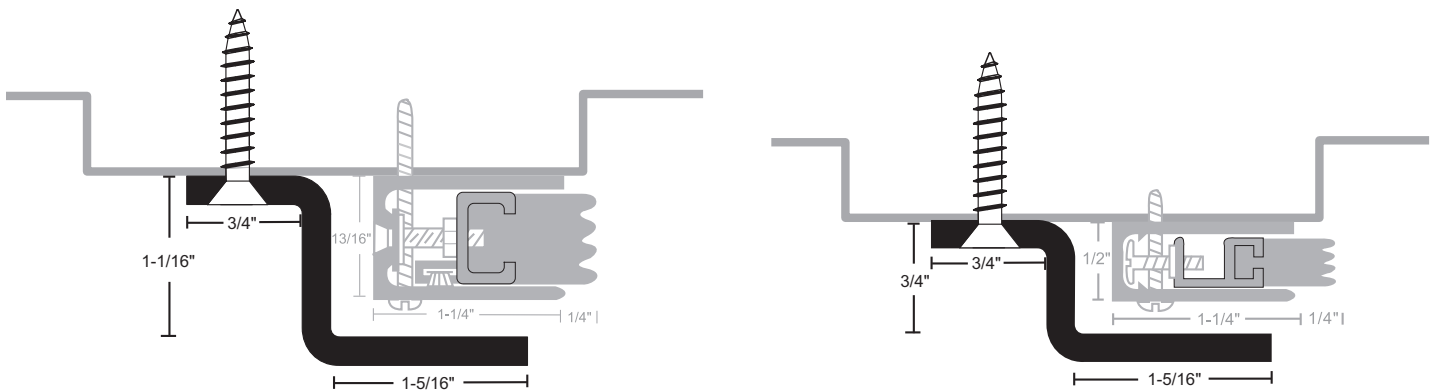

NOTE: Install seals and brackets before the closer. Seals and brackets installed at head will require the closer body be installed lower on the door.

Installation Instructions

1. Install perimeter seals following instructions furnished.
2. Position mounting bracket over seal where door closer shoe or exit device strike requires mounting.
3. Mark screw holes.
4. Drill pilot holes for screws using 11/64" drill bit.
5. Secure bracket with #12 x 1-1/4" SMS furnished.
6. Install closer shoe or exit device strike onto mounting bracket following manufacturer's instructions.



POSITIVE PRESSURE
TESTED
MISCELLANEOUS
FIRE DOOR
ACCESSORY