



421N

Neoprene Heavy Duty Surface or Half Mortise Sliding or Pocket Doors Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
 Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix
 Closed Cell Advanced Elastomeric Foam
 Color is Black


- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ Designed for use on Sliding or Pocket Doors
- ▶ A Series of Actuating Bars Keep the Seal Parallel to the Sill or Threshold Until the Door is in the Closed Position
- ▶ Available 11" to 144" in Length"
- ▶ End Caps Not Available
- ▶ 7/8" Max Drop

Finishes

421NA Anodized Aluminum
 421NDKB Dark Bronze

Options

1/16" Thick Lead Insert Available
 Up To 60" Maximum Length—
 Specify "Lead-Lined".

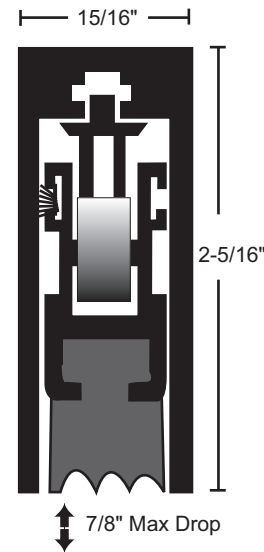

NGP-GKT-421N-PCS-1223-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
 Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
 Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

ngp.com
 1-800-NGP-RUSH