



5021

TPE Double Batwing Smoke Seal (Kerf Press-In)

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



Material

Self-Adhesive Thermo-Plastic Elastomer (TPE)

- ▶ Good Abrasion Resistance
- ▶ Moisture Resistant
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- ▶ Rigid Base with Flexible Elastomeric Fins
- ▶ Flame Resistant
- ▶ Temperature Range -60°F To 275°F
- ▶ Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- ▶ REACH And RoHS Compliant
- ▶ Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- ▶ Fits Kerf 1/8" Wide x 7/16" Deep
- ▶ 1/2" Wide x 1/2" + 11/32" Tall
- ▶ Available in 36", 48", 84", 96" and 108" Lengths

Color

- 5021B Brown
- 5021C Charcoal
- 5021W White

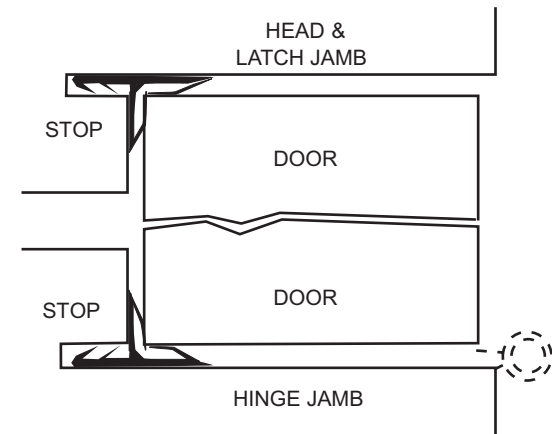

NGP-GKT-5021-PCS-1120-A