



# 5025

## TPE DOUBLE BATWING SMOKE SEAL

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material



Self-Adhesive Thermo-Plastic Elastomer (TPE)

- Good Abrasion Resistance
- Moisture Resistant
- BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- Rigid Base with Flexible Elastomeric Fins
- Flame Resistant
- Temperature Range -60°F To 275°F
- Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganism
- REACH and RoHS Compliant
- Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- Superior Sealing Characteristics Against Smoke, Air & Sound
- ½" Wide x ½" Tall
- Available in 36", 48", 72", 84", 96" and 108" Lengths

*\* Anti-microbial not available in clear*

#### Color

- 5025B Brown
- 5025C Charcoal
- 5025W White
- 5025CL Clear

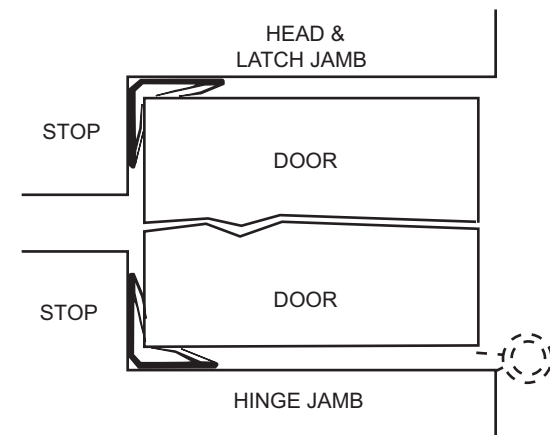

NGP-GKT-5025-PCS-0720-A