



# 5025

## TPE Double Batwing Smoke Seal

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material



Self-Adhesive Thermo-Plastic Elastomer (TPE)

- ▶ Good Abrasion Resistance
- ▶ Moisture-Resistant
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- ▶ Rigid Base with Flexible Elastomeric Fins
- ▶ Flame-Resistant
- ▶ Temperature Range -60°F To 275°F
- ▶ Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganism
- ▶ REACH and RoHS Compliant
- ▶ Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year when Stored at 75°F and 50% Relative Humidity or Less
- ▶ Superior Sealing Characteristics Against Smoke, Air & Sound
- ▶ ½" Wide x ½" Tall
- ▶ Available in 36", 48", 72", 84", 96" and 108" Lengths

*\*Anti-Microbial Not Available in Clear*

#### Color

- 5025B Brown
- 5025C Charcoal
- 5025W White
- 5025CL Clear

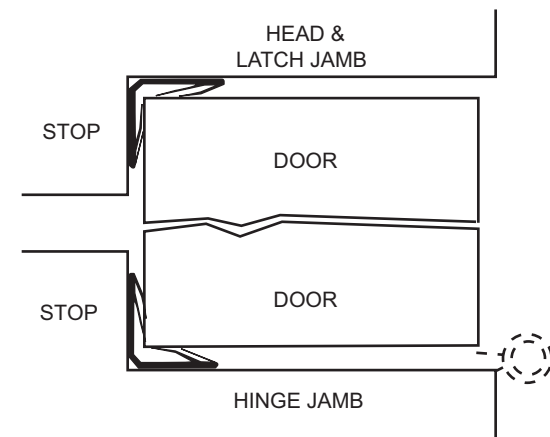

NGP-GKT-5025-PCS-0323-A

**NGP MEMPHIS**  
 4985 East Raines Road  
 Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
 4584 Calimesa Street  
 Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

**ngp.com**  
 1-800-NGP-RUSH