



# 5075

## TPE Triple Fin Smoke Seal

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

#### Material




Self-Adhesive Thermo-Plastic Elastomer (TPE)

- ▶ Good Abrasion Resistance
- ▶ Moisture Resistant
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- ▶ Rigid Base with Flexible Elastomeric Fins
- ▶ Flame Resistant
- ▶ Temperature Range -60°F To 275°F
- ▶ Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- ▶ REACH and RoHS Compliant
- ▶ Modified Acrylic Pressure Sensitive Adhesive Protected by Release Liner
- ▶ Provides High Initial Adhesion and Long Term Holding Power for Permanent Mounting in Exterior or Interior Locations
- ▶ Resistant to Aging, Weathering, UV Radiation, Water, Detergent, Alcohol and the Influence of Chemicals
- ▶ End Use Temperature Range of Adhesive, Long Term Exposure -30°F Up To 250°F
- ▶ Shelf Life of Adhesive Prior to Installation is One Year When Stored at 75°F and 50% Relative Humidity or Less
- ▶ ½" Wide x ¾" Tall
- ▶ Available in 36", 48", 72", 84", 96" and 108" Lengths.  
White only available in 36", 48", 84" and 96" Lengths

*\* Anti-microbial not available in clear*

#### Color

- 5075B Brown
- 5075C Charcoal
- 5075CL Clear
- 5075W White

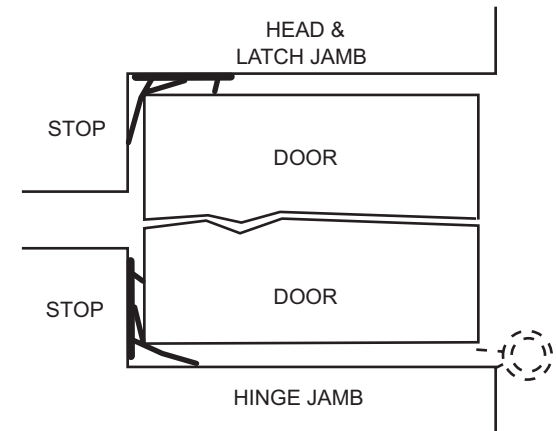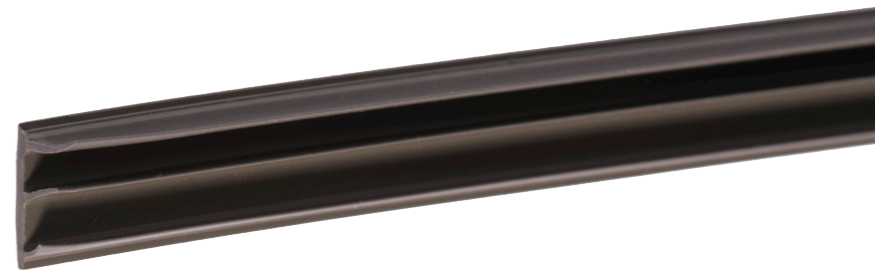

NGP-GKT-5075-PCS-1120-A