



# 700EU

Perimeter Seal Compatible with Parallel Arm Closers

## PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:


### Material

Aluminum Alloy 6063, T5 Temper  
Polyurethane is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength, Memory and UV Resistance
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -65°F to 175°F
- ▶ No Break-in Seal for Closer Mounting
- ▶ Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- ▶ Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- ▶ Head Section Not Drilled
- ▶ Jamb Sections Furnished With Slotted Holes for Adjustment
- ▶ Self-Drilling #8 (Tek Type) Screws Furnished

### Finishes

700EU Mill Aluminum  
700EUDKB Dark Bronze

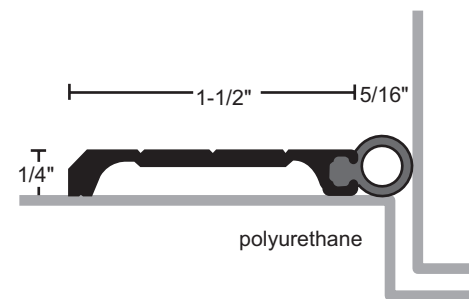

NGP-GKT-700EU-PCS-1120-A