



705V

Perimeter Seal Compatible with Parallel Arm Closers

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
 Thermoplastic Polymer: Polyvinyl Chloride (PVC) Formulated
 With an Environmentally Friendly Bio-Based Plasticizer
 Vinyl is Gray


- ▶ Economical
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range 0°F to 140°F
- ▶ Oxidative degradation From Age and Exposure to Cold, Heat and UV Causes Hardening, Loss of Memory and Resilience, Cracking, Crazeing and Discoloration
- ▶ No Break-in Seal for Closer Mounting
- ▶ Closer and/or Overhead Holder Attach to Frame Through Weatherseal Section. Install Seal First
- ▶ Allows Mounting of Rim Exit Device Strikes Without Notching Gasketing
- ▶ Head Section Not Drilled
- ▶ Jamb Sections Furnished With Slotted Holes for Adjustment
- ▶ Self-Drilling #8 (Tek Type) Screws Furnished
- ▶ May Be Cut to Fit Narrow Frame Stops
- ▶ Specify "Cut to Width" on Order

Finishes

- 705V Mill Aluminum
- 705VA Anodized Aluminum
- 705VB Gold
- 705VDKB Dark Bronze

Options

- FATT - Fast Attach Tape

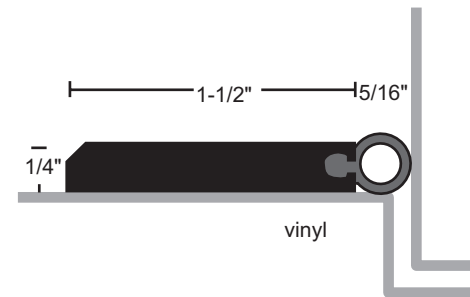

NGP-GKT-705V-PCS-1120-A