



# Perimeter Seal Compatible with Parallel Arm Closers 706





**Material**  
 Aluminum alloy 6063, T5 temper  
 Synthetic polymer: Polyamide  
 Nylon brush

- Excellent abrasion resistance, flexibility and memory
- Moisture resistant
- Retains insecticides well
- Temperature range -70°F to 425°F
- BHMA Certified to ANSI/BHMA A156.22 performance tests for heat, cold, air infiltration and smoke infiltration in most common profiles as indicated by BHMA Certified symbol
- REACH and RoHS compliant
- Not effective against water penetration
- No break in seal for closer mounting
- Closer and/or overhead holder attach to frame through weatherseal section. Install seal first
- Allows mounting of rim exit device strikes without notching gasketing
- Head section not drilled
- Jamb sections furnished with slotted holes for adjustment
- Self drilling #8 (Tek type) screws furnished

**Finishes**

706A	Anodized Aluminum	Gray Brush
706B	Gold	Black Brush
706DKB	Dark Bronze	Black Brush

**Options**  
 FATT - Fast Attach Tape

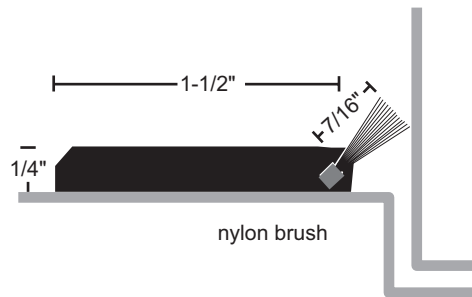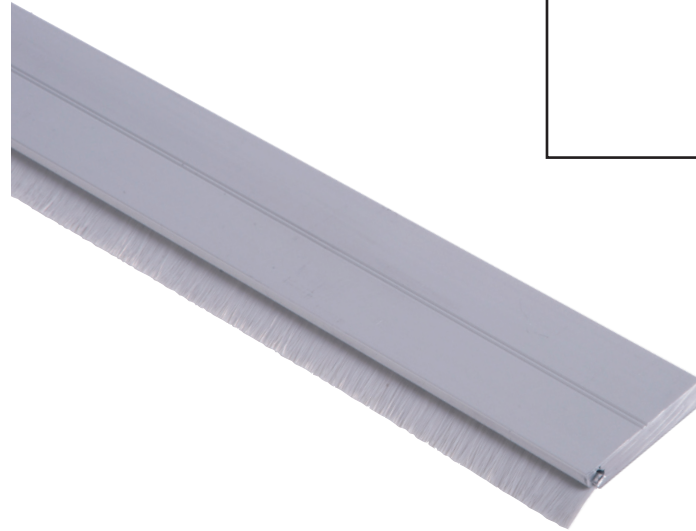

<b>Project:</b>
<b>Submitted by:</b>
<b>Date:</b>
<b>Notes:</b>