



780S

Silicone Slimline Automatic Door Bottom

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane
Silicone Is Gray



- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and longer may be Cut up to 4" in the Field, under 36" should not be Cut in the Field, Order Net Length
- ▶ Available 23" to 96" in Length
- ▶ End Caps Furnished Standard
- ▶ Will Work Half Mortised on Swing or Sliding Doors
- ▶ Endurance Tested to 5 Million Cycles
- ▶ 1/2" Max. Drop

Finishes

780SA Anodized Aluminum
780SDKB Dark Bronze



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

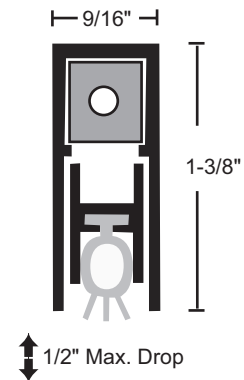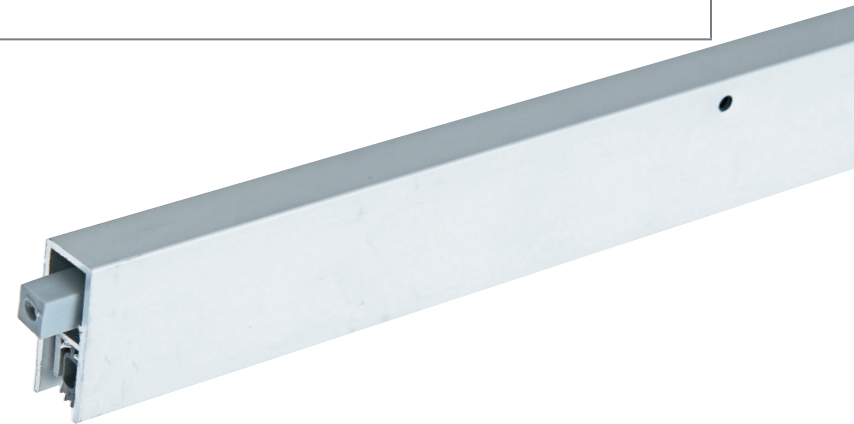

NGP-GKT-780S-PCS-1123-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH