



780S

SILICONE SLIMLINE AUTOMATIC DOOR BOTTOM

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane
Silicone Is Gray


- ▶ Excellent Flexibility and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and Longer May Be Cut Up To 4" in the Field, Under 36" Should Not Be Cut in the Field, Order Net Length
- ▶ Available 23" to 96" in Length
- ▶ End Caps Furnished Standard
- ▶ Will Work Half Mortised on Swing or Sliding Doors
- ▶ Endurance Tested to 5 Million Cycles
- ▶ 1/2" Max. Drop

Finishes

780SA Anodized Aluminum
780SDKB Dark Bronze



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

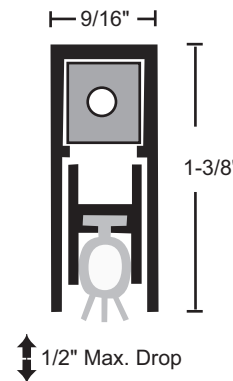

NGP-616P2023-PCS-0820-A