





8135

Bumper Seal
Threshold

1/2" x 3 3/4"



- ▶ Aluminum Alloy
6063, T5 Temper
- ▶ 3 3/4" Wide x 1/2" Tall
- ▶ Smooth Top
- ▶ Typical Wall
Thickness: .115"
- ▶ Weight: .60 Lbs./Ft.
- ▶ #10 x 1 1/2" FH Zinc
Plated Wood
Screws Included.
Dark Bronze
Supplied With DKB
Thresholds.

 (V) Vinyl Bumper Seal Standard
Optional: (N) NGP-TPV
(S) Silicone



POSITIVE PRESSURE TESTED
GASKETING MATERIALS
FOR FIRE DOORS. FOR
APPLICATION TO HOLLOW-
METAL-TYPE FIRE DOORS,
RATED UP TO 3 HOURS AND
WOOD-TYPE FIRE DOORS,
RATED UP TO 1 1/2 HOURS.
CATEGORY J

THRESHOLD


ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: quotes@ngp.com

11.24

INSTALLATION INSTRUCTIONS

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.

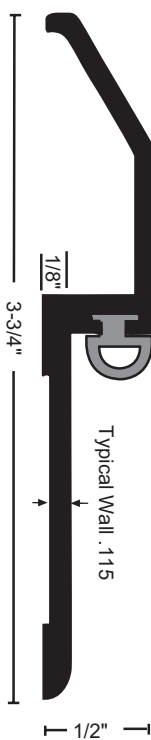

THE PRODUCTS
YOU COUNT ON
THE PEOPLE
YOU TRUST
ngp.com

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706