



9001

ALLSEAL® GASKETING PERIMETER SEAL

PRODUCT CUT SHEET

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
Silicone Plus is Tan


- ▶ Premium Grade Seals Specially Formulated to Withstand Greater Temperature Extremes While Providing Maximum Protection Against Air Infiltration
- ▶ Excellent Flexibility and Memory
- ▶ Flame Resistant
- ▶ Moisture Resistant
- ▶ Temperature Range -100°F To 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended For Areas Using FM200 or Halon Fire Suppression Systems
- ▶ #6 x 3/4" Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes Slotted for Adjustment

Finishes

9001A Anodized Aluminum
9001B Gold
9001DKB Dark Bronze



| |
|---------------|
| PROJECT: |
| SUBMITTED BY: |
| DATE: |
| NOTES: |

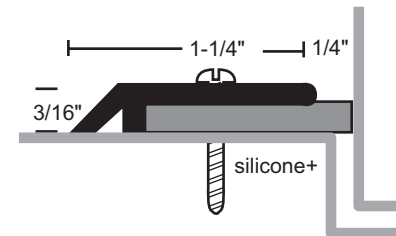

NGP-GKT-9001-PCS-0720-A